


# Product Data Sheet

## Parquet Battens Oak Prime Fumed - Also known as overlays

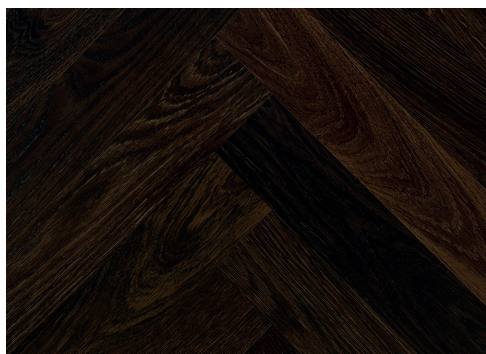

Should you require the information on any other details please contact the sales team on **020 8501 6730** or [info@wfa.uk.net](mailto:info@wfa.uk.net)

**MADE IN BRITAIN**



### Product Details

Product Description:	10mm Parquet Battens
Wood Species:	European Oak
Construction:	Solid
Product Type:	Battens
Grade:	Prime
Treatment:	Fumed *
Total Thickness:	10mm
Width:	70mm
Length:	350mm
Wear Layer:	N/A
Core Layer:	N/A
Profile:	Square Edged
Edge Profile:	Square Edged
Finish:	Unfinished

### Technical Information

Country of Manufacture:	Europe
FSC®:	FSC 100% FSC-C111710
Lamination:	N/A
Glue Line:	N/A
Norm:	EN 14342:2013
Reaction to Fire:	Cl-s1
Density:	630 kg/m <sup>3</sup>
Formaldehyde Emissions:	N/A
Warmth Conduction (approx):	10mm – 0.074 W/m K
Production Tolerances;	
Width:	+/- 0.09mm
Thickness (Total):	+/- 0.20mm
Length:	+/- 0.09mm
90° Angle:	+/- 0.05°

\* Our fumed and smoked colours are achieved through a process which reacts with the natural tannins in the oak. Although we use controlled processes when smoking **variation in colour will occur** and the final colours are dictated by nature and not by using pigmented stains.

### Grading

Maximum Size of Sound Knots:	Not Allowed - Occasional Pin Knots < 10mm
Maximum Size of Filled Knots:	Not Allowed
Filled Defects:	Not Allowed
Sap Wood:	Minimal Edge and Core Sap Wood
Colour Variation:	Natural Variation Allowed
Grain Variation:	Mixture of Natural Grain

### Installation

Installation Method:                      Glued      Pinned      Floated on Underlay

*Please also refer to our guidelines.*                      ✓                      ✓

NOTE: The fully bonded method of installation is recommended.

**Over Underfloor Heating:** When glued to an appropriate subfloor this product is suitable for use with water and some electric systems. Floor probes must be installed to control and regulate the flooring temperature which must not exceed 27°C. We also highly recommend the installation of a data recording Fidbox which measures and logs the temperature and humidity levels, see the data sheet for more information or [www.floorprotector.at](http://www.floorprotector.at)

Site Conditions: 45 – 65% relative humidity & 15 – 25°C room temperature.

### Maintenance Advice

To fully aid in the care of the floor it is advised that all precautions are carried out. Avoid scratches by minimising grit and dust, install doorway entrance mats and apply felt pads to furniture. Use PH neutral cleaners and avoid soaking the floor with water at all times.

Recommended Products	Initial	Regular	Monthly	Long Term
Sweep / Vacuum:	✓	✓		
Oiled Finish				
Osmo Wash and Care:		✓		
Osmo Maintenance Oil:				✓

**Guarantee:** 25 years; The lifetime of our guarantee covers the structural integrity of the product being the lamination, production, dimensions and grading. Please see our guarantee sheet for full details.