


# Product Data Sheet

## Solid Tumbled Blocks Oak Rustic 22mm

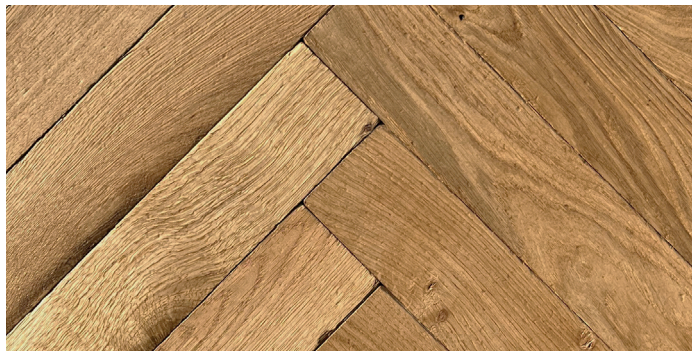

Should you require the information on any other details please contact the sales team on **020 8501 6730** or [info@wfa.uk.net](mailto:info@wfa.uk.net)

**MADE IN BRITAIN**



### Product Details

Product Description:	T&G Wood Blocks
Wood Species:	European Oak
Construction:	Solid
Product Type:	Blocks
Grade:	Rustic
Total Thickness:	22mm
Width:	70mm
Length/s:	230 / 280 / 350mm
Wear Layer:	N/A
Core Layer:	N/A
Profile:	Tongue & Grooved All Round Tumbled
Edge Profile:	Square Edged Tumbled
Finish:	Unfinished

### Technical Information

Country of Manufacture:	Europe
FSC®:	FSC MIX Credit FSC-C111710
Lamination:	N/A
Glue Line:	N/A
Norm:	EN 14342:2005+A1:2008
Reaction to Fire:	C <sub>i</sub> -s1
Density:	650 kg/m <sup>3</sup>
Formaldehyde Emissions:	Class E1 Zero Emissions
Warmth Conduction (approx):	22mm – 0.16 W/m K
Production Tolerances;	
Width:	+/- 0.2mm
Thickness (Step Between Pieces):	+/- 0.2mm Unfinished +/- 0.5mm Finished
Length:	+/- 0.5mm
90° Angle:	+/- 0.2°

### Grading

Maximum Size of Sound Knots:	Up to 70mm
Maximum Size of Filled Knots:	Up to 35mm
Filled Defects:	Not Filled
Sap Wood:	Minimal Edge and Core Sap Wood
Cracks:	Possible
Colour Variation:	Natural Variation Allowed
Grain Variation:	Mixture of Natural Grain and Knots

### Installation

Installation Method: Glued Nailed Floated on Underlay

*Please also refer to our guidelines.* ✓

NOTE: The fully bonded method of installation is recommended.

Over Underfloor Heating: N/A

Site Conditions: 45 – 65% relative humidity & 15 – 25°C room temperature.

### Maintenance Advice

To fully aid in the care of the floor it is advised that all precautions are carried out. Avoid scratches by minimising grit and dust, install doorway entrance mats and apply felt pads to furniture. Use PH neutral cleaners and avoid soaking the floor with water at all times.

Recommended Products	Initial	Regular	Monthly	Long Term
Sweep / Vacuum:	✓	✓		
<b>Oiled Finish</b>				
Osmo Wash and Care:		✓		
Osmo Maintenance Oil:				✓
<b>Lacquered Finish</b>				
Bona Cleaner:		✓		
Bona Refresher:				✓

**Guarantee:** 25 years; The lifetime of our guarantee covers the structural integrity of the product being the lamination, production, dimensions and grading. Please see our guarantee sheet for full details.