

www.wfa.uk.net • CALL 020 8501 6730 • info@wfa.uk.net

- Extensive stock of FSC European engineered flooring
- State of the art texturing and prefinishing department
- Dedicated sample lab with experienced colour technicians
- Leading brands of quality accessories
- Next day Nationwide deliveries
- Same day London deliveries
- Established in 1999









EXTENDED ORDER CUT OFF TIME

All orders for stock items placed before 3pm will be available for next day delivery.

OUR TRADE COUNTER IS OPEN

7.00AM - **5.00**PM MONDAY TO THURSDAY LAST ORDERS PROCESSED AT 4.30PM

7.00AM - **4.30**PM FRIDAY LAST ORDERS PROCESSED AT 4.00PM

WE DELIVER 6 DAYS A WEEK *subject to delivery terms

For sales call 020 8501 6730

info@wfa.uk.net • www.wfa.uk.net

Payment methods: Cash, Visa, Mastercard, Debit Cards, BACS &

Monthly Credit Account (Subject to terms & approval) Please note we do not accept American Express or Cheques.

We are certified to FSC[®] & PEFC[™] standards and can provide full chain of custody for projects and the certified stock items identified in this catalogue.



This logo will identify the FSC-certified products throughout the price list.

DELIVERY TERMS - for UK Mainland on all orders placed before 3pm

WOOD FLOORING PRICES

FREE	Next Day Service - Business Hours on orders over £500 +VAT
£65.00 +VAT	Next Day Service - Business Hours on orders below £500 +VAT
£80.00 +VAT	Next Day - Before 10.30am*
£95.00 +VAT	Saturday - Before 1.00pm*
	MACHINERY & ACCESSORII Next Day Service - Business Hours on orders over £150 +VAT
£10.00 +VAT	Next Day Service - Business Hours on orders below £150 +VAT
£30.00 +VAT	Next Day - Before 10.30am

PLEASE NOTE: Reclaimed Floorboards and **various products** within the **Accessories** section are excluded from the above pricing structure due to their size, weight or flammability . See inside back cover.

Saturday - Before 10.00am

*This is subject to your local depots delivery service.







FOLLOW US ON

£40.00 +VAT









Stock

With an extensive stock of flooring, accessories and the leading brands in tools, we offer a nationwide next day delivery with optional timed services.

Our 33,000 Sq Ft premises is conveniently located minutes from the A127/A12/A118 and near Junction 28 of the M25 allowing us to also offer same day deliveries into London.







Service

Our trade counter and sales team are available Monday to Friday to offer expert advice and arrange your orders for prompt delivery to site or collection from our warehouse.

With a fully stocked sample department, hand samples can be sent Free of charge directly to your customer within 24 hours.



Meet the team

Since 2000 we have built a very strong team of experienced staff who have helped us to achieve an excellent reputation within the industry for the service and quality products we offer. Many have worked for the company for over 10 years and understand our values of honesty, integrity and reliability.

WHAT'S **NEW** FOR 2020

Every new year bring's with it **NEW** products from us as we strive to evolve within the industry. Listening to what you and your customers need we work hard in supplying this to you! Along with **OUR NEW** and exciting flooring options our suppliers are also continuously looking at producing new ways of making your lives easier.

Across this spread are a just few of the aforementioned items that we have added to our price list...






Our Callisto Collection has been a great success so far and is new to this price list, available in 6 great colours

see pages 8 & 9.







Dry in 1 hour – ready to glue or level with D3045 & Z715.



Reclaimed Oak in Plank. Herringbone and Chevron, so beautifully full of character in 4 choices of finish.

- Unfinished •
- Natural Oil •
- Light Smoked and Oiled •
- Dark Smoked and Oiled •





Square edge stair nosing for 15/20mm flooring see page 117.



WQKOL

NEW Callisto Collection	8-9	Kährs	
NEW Genuine Reclaimed Oak	10-11	Elegance	50-51
London Collection	12-13	End Grain	52-53
Stability Planks Unfinished	14-15	Mosaic Panels	54-55
Stability Design Blocks and Chevrons	16-17	Parquet Battens	56-57
Stability Design Mansion Weave, Cube, Hexagor	n 18-19	Parquet Strip	58-59
and Continuous Versailles		Parquet Panels	60-61
Stability Design Panels	20-23	Parquet Borders	62-63
Truly Bespoke Wood Floors - TBWF	24-25	Parquet Motifs	64-65
TBWF The Laboratory	26	Solid T&G Wood Strip Unfinished	66-67
TBWF Stairs and Mouldings	27	Solid T&G Wood Blocks Unfinished	68-69
TBWF Grading, Tumbling and Smoking	28-31	Tumbled Blocks and Battens	
TBWF Core Range		Reclaimed Floorboards	72
Bespoke Flooring	46-47		
Air Nailers and Staplers.	73	Festo Power Tools	
Bona Sanding Machines		Hand Tools	90-92
Compressors	77	Maxvac	93
Diamabrush	78	Leica Laser Measure	94
Fidbox and Hmbox		LCD Thermometer and Hygrometer	
Fein Power Tools	80	Moisture Meters - Protimeter	
Surebuild		Moisture Meters - Tramex	97
Abrasives	98-102	Matting	126
Adhesives and Applicators		Oils and Stains	
CMS Danskin Cradles, Battens and Regupol		Plywood, Hardboard and Chipboard	
Fillers		Protection Products	
Fixings		Sanding and Polishing Accessories	
Hardwood Mouldings		Trims (Metal)	
Lacquers		Underfloor Heating	
Levelling, Primers and DPM's		Underlays	140-141
Bona Lacquer and Oil Maintenance	142 142	Lobacare® Lacquer Maintenance	146
Junckers Lacquer and Oil Maintenance		Felt Pads	
Osmo Oil Maintenance	144-145	Terms and Conditions	Thside Back Cover

• NEW six colour range PURO, PRIMO, NERO, PIETRA, FLAVIA & LUNA

- Produced in Europe
- 100% FSC European Oak Rustic

Profile: T&G, ends matched, Planks 2 sided bevel, Herringbone 4 sided bevel

Thickness: 12/3mm Finish: UV oiled matt **Installation:** Glued

Length Specification: Planks 180 x 600 – 2400mm, Herringbone 120 x 600mm





Plank **PURO** Euro Oak Rustic UV Oiled Matt 180 x 12/3mm



Plank **PRIMO** Euro Oak Rustic UV Oiled Matt 180 x 12/3mm



Plank **NERO** Euro Oak Rustic UV Oiled Matt 180 x 12/3mm



Herringbone **PURO** Euro Oak Rustic UV Oiled Matt 600 x 120 x 12/3mm



Herringbone **PRIMO** Euro Oak Rustic UV Oiled Matt 600 x 120 x 12/3mm



Herringbone **NERO** Euro Oak Rustic UV Oiled Matt 600 x 120 x 12/3mm



Plank **PIETRA** Euro Oak Rustic UV Oiled Matt 180 x 12/3mm



Herringbone **PIETRA** Euro Oak Rustic UV Oiled Matt 600 x 120 x 12/3mm



Plank **FLAVIA** Euro Oak Rustic UV Oiled Matt 180 x 12/3mm



Herringbone **FLAVIA** Euro Oak Rustic UV Oiled Matt 600 x 120 x 12/3mm



Plank **LUNA** Euro Oak Rustic UV Oiled Matt 180 x 12/3mm



Herringbone **LUNA** Euro Oak Rustic UV Oiled Matt 600 x 120 x 12/3mm

GENUINE RECLAIMED OAK

- Our genuine reclaimed products are produced from 60-100 year old beams reclaimed from old buildings in France and Germany.
- Open splits, knots, holes and dead worm holes are filled with black filler and the surface heavy brushed to leave some of the filler lower and emphasise the appearance of these features.
- Original bandsawn and planer marks plus irregular edges may be visible and add to the characteristics of a reclaimed floor.

Profile: Planks and Chevron 2 sided micro bevelled, Herringbone 4 sided micro bevelled

Thickness: 20.5/5.5mm

Finish: Unfinished / natural oiled / light smoked & oiled

/ dark smoked & oiled

Dimensions: Planks* 215 - 225 x 600 - 2400mm Herringbone 100 x 500mm Chevron 120 x 600mm

* subject to current stock

All produced to order 4 – 6 weeks



Irregular edges



Bandsawn



Partially filled cracks



Partially filled knots



Woodworm[†] and sapwood



Unfinished

20.5/5.5 x 215 - 225mm



Plank Rustic Natural Oiled

20.5/5.5 x 215 - 225mm



Plank Rustic Light Smoked & Oiled

20.5/5.5 x 215 - 225mm




Plank Rustic Dark Smoked & Oiled

20.5/5.5 x 215 - 225mm



Herringbone Rustic Unfinished

20.5/5.5 x 100 x 500mm



Herringbone Rustic Natural Oiled

20.5/5.5 x 100 x 500mm



Herringbone Rustic Light Smoked & Oiled

20.5/5.5 x 100 x 500mm



Herringbone Rustic Dark Smoked & Oiled

20.5/5.5 x 100 x 500mm



45/60° Chevron Rustic Unfinished

20.5/5.5 x 120 x 600mm



45/60° Chevron Rustic Natural Oiled

20.5/5.5 x 100 x 500mm



45/60° Chevron Rustic Light Smoked & Oiled

20.5/5.5 x 100 x 500mm



Dark Smoked & Oiled

20.5/5.5 x 100 x 500mm

L#NDON COLLECTION

- Produced in Europe
- 100% FSC European Oak
- Project Range Produced to order 4 8 weeks
- Bespoke range of colours available

Profile: T&G, ends matched, micro bevelled

or square edged

Thickness: 10/4mm (6mm Birch plywood & 4mm Oak)

Finish: UV oiled or lacquered

Installation: Glued

Length Specification: Planks 1000 – 1200mm







Herringbone Prime Lacquered/Oiled 490 x 70 x 10/4mm 500 x 90 x 10/4mm



Herringbone Rustic Lacquered/Oiled 490 x 70 x 10/4mm 500 x 90 x 10/4mm



Herringbone Prime Fumed Lacquered/Oiled 490 x 70 x 10/4mm 500 x 90 x 10/4mm



Chevron Prime Lacquered/Oiled 500 x 90 x 10/4mm



Chevron Rustic Lacquered/Oiled 500 x 90 x 10/4mm



Chevron Prime Fumed Lacquered/Oiled 500 x 90 x 10/4mm



Plank Prime Lacquered/Oiled 120 x 10/4mm



Plank Rustic Lacquered/Oiled 120 x 10/4mm



Plank Prime Fumed Lacquered/Oiled 120 x 10/4mm

FLOORING

STABILITY

Produced in Europe

Profile: T&G, ends matched and 2 sided micro bevelled edges

Thickness: 12/3mm, 15/4mm and 20/6mm

Finish: Unfinished/lacquered

Installation: Secret nailed/glued/floated

Length Specification: Random lengths 1400 – 2400mm for 20mm and 600 – 2200mm for 12/15mm NOTE Square Edged Profile: 140/180/220/260 x 20mm Rustic in stock. Other sizes produced to order

* Produced to order - Wenge/Douglas Fir/American Black Walnut 3 – 4 weeks





Euro Oak Rustic Unfinished

180 x 12/3mm



Euro Oak Rustic 'Fumed' Unfinished

180 x 20/6mm



Douglas Fir Nature/Rustic Unfinished* 180 x 20.5/5.5 mm 250 x 20.5/5.5 mm 300 x 20.5/5.5 mm



Euro Oak Prime Unfinished 140 x 15/4mm 180 x 15/4mm 220 x 15/4mm



Euro Oak Prime 'Fumed' Unfinished

180 x 20/6mm 220 x 20/6mm 260 x 20/6mm



American Black Walnut Prime Unfinished*

180 x 20/6mm



Euro Oak Rustic Unfinished 140 x 15/4mm 180 x 15/4mm 220 x 15/4mm



Euro Oak Rustic Satin Lacquered

180 x 20/6mm



Euro Oak Rustic Unfinished 140 x 20/6mm 180 x 20/6mm 220 x 20/6mm

260 x 20/6mm 300 x 20/6mm



Wenge Prime Unfinished*


Euro Oak Prime Unfinished 140 x 20/6mm

160 x 20/6mm 180 x 20/6mm 200 x 20/6mm 220 x 20/6mm

260 x 20/6mm 300 x 20/6mm

140/180/220/260 x 20mm is **IN STOCK** with a **Square Edged Profile** all other widths and grades are produced to order.

STABILITY DESIGN

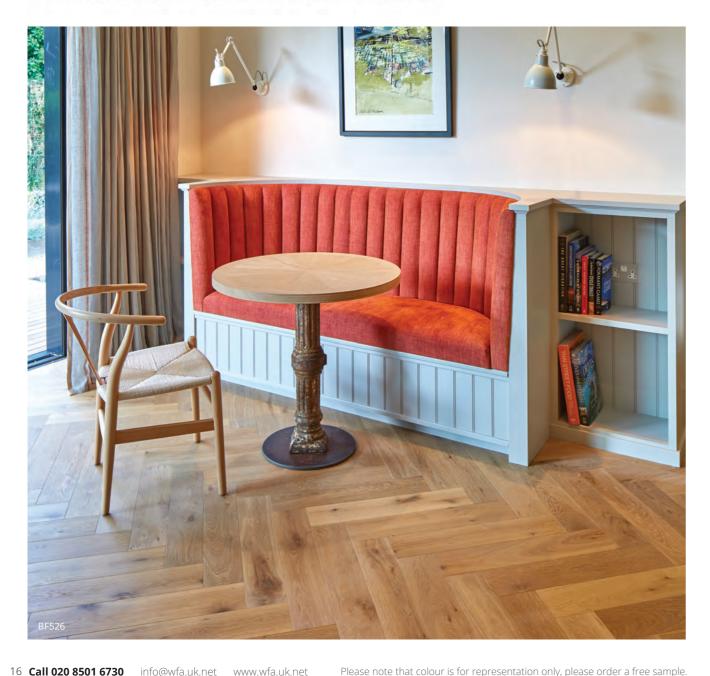

Produced in Europe

Profile: 500 x 90mm T&G all sides - 4 sided micro bevelled (square edged available to order 4 - 6 weeks) 600 x 120mm T&G all sides - 4 sided micro bevelled (square edged available to order 4 - 6 weeks) 350 x 70mm T&G grooved both ends - square edged (4 sided micro bevelled available to order 4 - 6 weeks)

Thickness: 10/4mm, 12/3mm, 15/4mm and 20/6mm

Finish: Unfinished

Size: 280 x 70mm, 350 x 70mm, 500 x 90mm and 600 x 120mm

Installation: Glued

* Produced to order - approx 6 – 8 weeks



European Oak Prime Blocks

500 x 90mm 10/4mm 15/4mm 20/6mm



European Oak Prime 'Fumed' Blocks

500 x 90mm 10/4mm 15/4mm 20/6mm



European Oak Rustic Blocks 500 x 90mm 10/4mm 15/4mm 20/6mm 600 x 120mm 12/3mm



European Oak Prime 'Fumed' Chevrons

500 x 90mm 10/4mm 15/4mm 20/6mm



European Oak Prime Blocks 280 x 70mm 15/4mm 20/5mm 350 x 70mm 15/4mm

20/5mm



European Oak Prime Chevrons





280 x 70mm 15/4mm 20/5mm 350 x 70mm 15/4mm 20/5mm



European Oak Rustic Chevrons

500 x 90mm 10/4mm 15/4mm 20/6mm

STABILITY DESIGN



- Produced in Europe
- 100% FSC European Oak
- Bespoke finishing available
- Produced to order 4 6 weeks

Profile: Grooved to all sides - supplied with false tongues

Thickness: 15/4mm and 20/6mm

Finish: Unfinished **Installation:** Glued

• Images are to show the pattern only and not the grading

Component Sizes

Cube 200mm wide

Mansion Weave 200mm wide centre & 90mm wide weave

> Hexagon 200mm wide

Continuous Versaille 350 x 70mm & 140 x 140mm



Cube Prime 15/4mm Rustic 15/4mm Prime 20/6mm Rustic 20/6mm



Cube Fumed Prime 15/4mm Rustic 15/4mm Prime 20/6mm Rustic 20/6mm



Mansion Weave Prime 15/4mm Rustic 15/4mm Prime 20/6mm Rustic 20/6mm



Mansion Weave Fumed Prime 15/4mm Rustic 15/4mm Prime 20/6mm Rustic 20/6mm



Hexagon Prime 15/4mm Rustic 15/4mm Prime 20/6mm Rustic 20/6mm



Hexagon Fumed Prime 15/4mm Rustic 15/4mm Prime 20/6mm Rustic 20/6mm



Continuous Versaille Prime 15/4mm Rustic 15/4mm Prime 20/6mm Rustic 20/6mm



Continuous Versaille Fumed Prime 15/4mm Rustic 15/4mm Prime 20/6mm Rustic 20/6mm

STABILITY PANELS*



- Produced in Europe
- Produced to order 4 6 weeks

Profile: Grooved to all sides - supplied with false tongues

Thickness: 20/6mm Finish: Unfinished Size: 1000 x 1000mm Installation: Glued



Versailles Euro Oak Prime

20/6mm



Versailles Euro Oak Prime Tumbled with Dowels

20/6mm



Versailles Euro Oak Rustic

20/6mm



Versailles Euro Oak Rustic Tumbled with Dowels

20/6mm



Chantilly Euro Oak Prime

20/6mm



Chantilly Euro Oak Prime Tumbled with Dowels

20/6mm



Chantilly Euro Oak Rustic

20/6mm



Chantilly Euro Oak Rustic Tumbled with Dowels

20/6mm

20 Call 020 8501 6730 info@wfa.uk.net www.wfa.uk.net Please note that colour is for representation only.

STABILITY PANELS








Surcharge applies per m²:

- Bevelled £8/m²
- Distressed edges £8/m²
- Brushed light, medium or heavy £8/m²

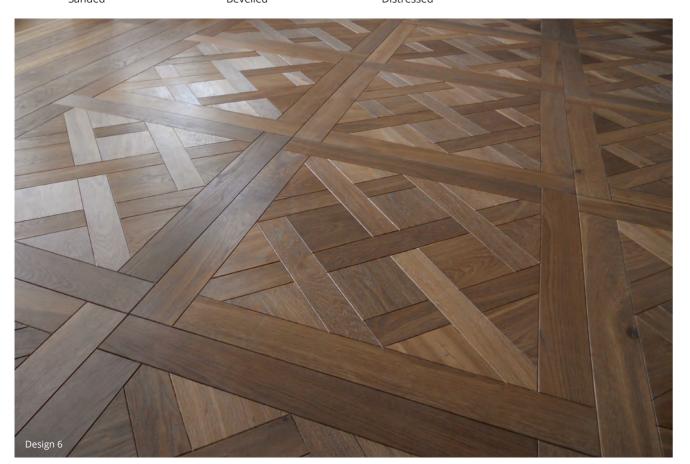

Produced in Europe

• Produced to order - 4 – 6 weeks

Profile: Grooved to all sides - supplied with false tongues

Thickness: 15/4mm and 20/6mm

Finish: Unfinished **Installation:** Glued



Design 1 - 570 x 570mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 2 - 660 x 660mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 3 - 660 x 660mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 4 - 660 x 660mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 5 - 800 x 800mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 6 - 800 x 800mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 7 - 810 x 810mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 8 - 800 x 800mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 9 - 840 x 840mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic



Design 10 - 600 x 600mm 15/4mm Prime 15/4mm Rustic 20/6mm Prime 20/6mm Rustic

TRULY BESPOKE WOOD FLOORS



With the market full of 1000s of combinations of textures, colours and finishes but sometimes restricted to certain widths and grades, we decided to offer a Truly Bespoke service and give you the option to choose what width, grade, texture and finish your client requires.

With an extensive range of unfinished stock of European Prime and Rustic Oak and 100% Fumed Oak we are able to offer you a prompt colour matching service and production time.

PLEASE NOTE The process of sample matching takes **10 working days** as we use the same extensive weighted method of application to ensure precise and consistent application of the oils and stains.



These examples are bespoke colours created from colour matching to supplied samples. Call to request yours.















Tumbling/Distressing



Surface Smoking



Colour Matching



Colour Mixing



Brushing/Texturing



Quality Control



Industrial Coating





Customised Packing



See Below



Your company name/logos are customised on the cover.

Finish references changed to suit ie: **TBOO901** to **WCOO901**.

















THE LABORATORY

MADE IN SITE OF THE SECOND SEC

We welcome all architects, designers and installers to visit our Lab. This is where we create our colour magic and are very proud to show off our Truly Bespoke service! Our *inspiration wall* is back and showcases 850 of the 2400+ finishes we've created to date.










STAIRS AND MOULDINGS

Our Truly Bespoke options are not limited to the production of beautiful floors. Visitors and customers alike are suitably impressed by our products on offer for the *linking of rooms*. This *bespoke service* includes the matching of stairs and mouldings to our ranges; thresholds, beadings and more!

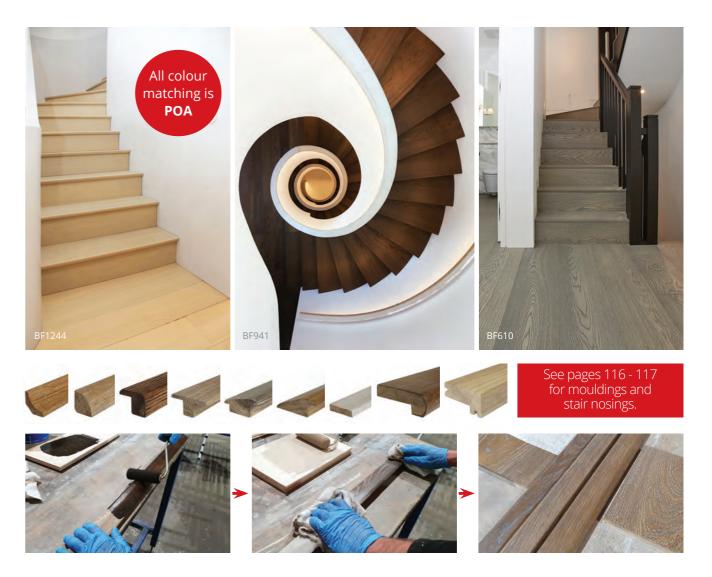







Please note that colour is for representation only, <u>please order a free sample</u>.

GENERAL	Clear grade with mixture of natural grain.
KNOTS	Occasional pin knots < 10mm.
SAPWOOD	Minimal edge and core sapwood.
COLOUR	Natural variation allowed with no heart wood.








GENERAL	Rustic grade with mixture of natural grain and knots.
KNOTS	Healthy sound knots up to 60mm with dead knots up to 25mm and holes firmly filled.
SAPWOOD	Minimal edge and core sapwood.
COLOUR	Natural variation allowed with some heart wood.



Each piece of flooring is tumbled to achieve an authentic aged look to the edges, corners and surface of the timber.



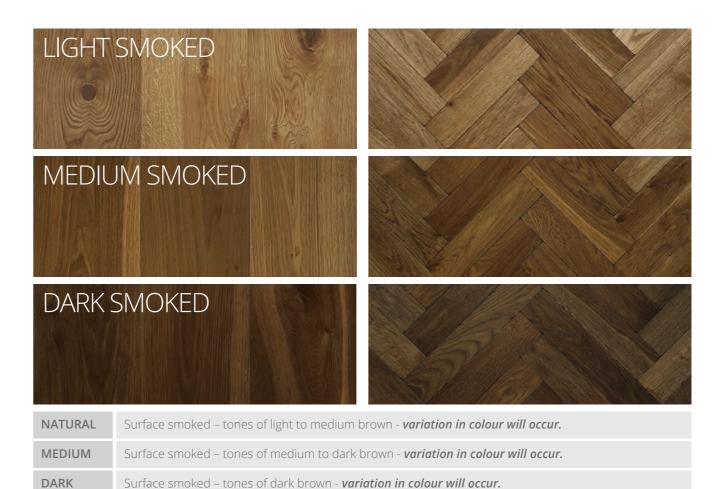

Our fumed and smoked colours are achieved through a process which reacts with the natural tannins in the oak and although we use controlled processes, the final colours are dictated by nature and not by using pigmented stains.






Truly Bespoke Code Reference		419	497	512	521	569	901	902	903	904	910	911	912	913	914	916	919	920	921
For colour descriptions see page			37	39	37	37	34	34	34	34	35	35	42	44	45	35	43	35	36
OAK																			
S)	Rustic - 180 x 12/3mm																		
	140 x 15/4mm																		
	180 x 15/4mm																		
	220 x 15/4mm																		
	140 x 20/6mm																		
	180 x 20/6mm																		
	220 x 20/6mm																		
PLANKS	260 x 20/6mm																		
₹ I	300 x 20/6mm																		
	Prime - 140 x 15/4mm																		
	180 x 15/4mm																		
	220 x 15/4mm																		
	140 x 20/6mm																		
	180 x 20/6mm																		
	220 x 20/6mm																		
	260 x 20/6mm																		
	300 x 20/6mm																		
	OAK	419	497	512	521	569	901	902	903	904	910	911	912	913	914	916	919	920	921
	Rustic - 500 x 90 x 10/4mm																		
	600 x 120 x 12/3mm																		
	350 x 70 x 15/4mm																		
	500 x 90 x 15/4mm																		
	600 x 120 x 15/4mm																		
S	350 x 70 x 20/5mm																		
Ò	500 x 90 x 20/6mm																		
Ō	600 x 120 x 20/6mm																		
BLOCKS	Prime - 500 x 90 x 10/4mm																		
ш	350 x 70 x 15/4mm																		
	500 x 90 x 15/4mm																		
	600 x 120 x 15/4mm																		
	350 x 70 x 20/5mm																		
	500 x 90 x 20/6mm																		
	600 x 120 x 20/6mm																		
	OAK	419	497	512	521	569	901	902	903	904	910	911	912	913	914	916	919	920	921
	Rustic - 500 x 90 x 10/4mm																		
()	500 x 90 x 15/4mm																		
ž	600 x 120 x 15/4mm																		
\circ	500 x 90 x 20/6mm																		
\mathbb{A}	600 x 120 x 20/6mm																		
Ш	Prime - 500 x 90 x 10/4mm																		
CHEVRONS	500 x 90 x 15/4mm																		
\cup	600 x 120 x 15/4mm																		
	500 x 90 x 20/6mm																		
	600 x 120 x 20/6mm																		


MADE IN SIRITAIN


All prices shown in red are non stock items. DELIVERY TIMES: Stock items 3 - 4 weeks and Non Stock Items 6 - 10 weeks, subject to finish.


FLOORING

922	923	924	925	926	929	932	934	938	939	941	943	944	1586	1587	1588	1975	1976	Truly Bespoke Code Reference
36	36	42	43	44	36	43	45	38	38	37	42	44	40	40	40	39	39	For colour descriptions see page
																		Prime - 140 x 15/4mm 180 x 15/4mm 180 x 15/4mm 120 x 15/4mm 140 x 20/6mm 180 x 20/6mm 220 x 20/6mm 260 x 20/6mm Prime - 140 x 15/4mm 180 x 15/4mm 120 x 15/4mm 120 x 15/4mm 140 x 20/6mm 180 x 20/6mm 220 x 20/6mm 220 x 20/6mm 300 x 20/6mm 300 x 20/6mm 200 x 20/6mm
922	923	924	925	926	929	932	934	938	939	941	943	944	1586	1587	1588	1975	1976	OAK Rustic - 500 x 90 x 10/4mm 600 x 120 x 12/3mm 350 x 70 x 15/4mm 500 x 90 x 15/4mm 600 x 120 x 15/4mm 350 x 70 x 20/5mm 500 x 90 x 20/6mm 600 x 120 x 20/6mm Prime - 500 x 90 x 10/4mm 350 x 70 x 15/4mm 500 x 90 x 15/4mm 600 x 120 x 15/4mm 500 x 90 x 15/4mm 350 x 70 x 20/5mm 500 x 90 x 20/6mm 600 x 120 x 20/6mm 600 x 120 x 20/6mm
922	923	924	925	926	929	932	934	938	939	941	943	944	1586	1587	1588	1975	1976	OAK Rustic - 500 x 90 x 10/4mm 500 x 90 x 15/4mm 600 x 120 x 15/4mm 500 x 90 x 20/6mm 600 x 120 x 20/6mm Prime - 500 x 90 x 10/4mm 500 x 90 x 15/4mm 600 x 120 x 15/4mm 500 x 90 x 20/6mm 500 x 90 x 20/6mm 600 x 120 x 20/6mm

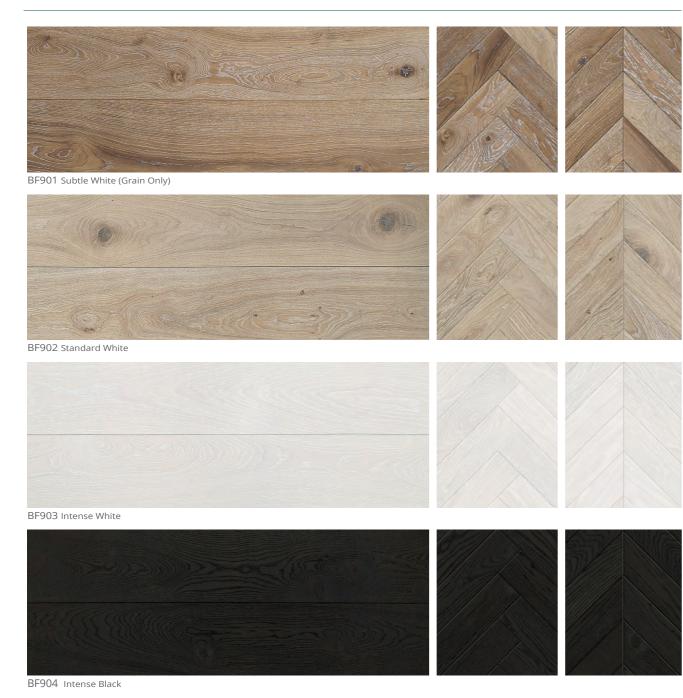

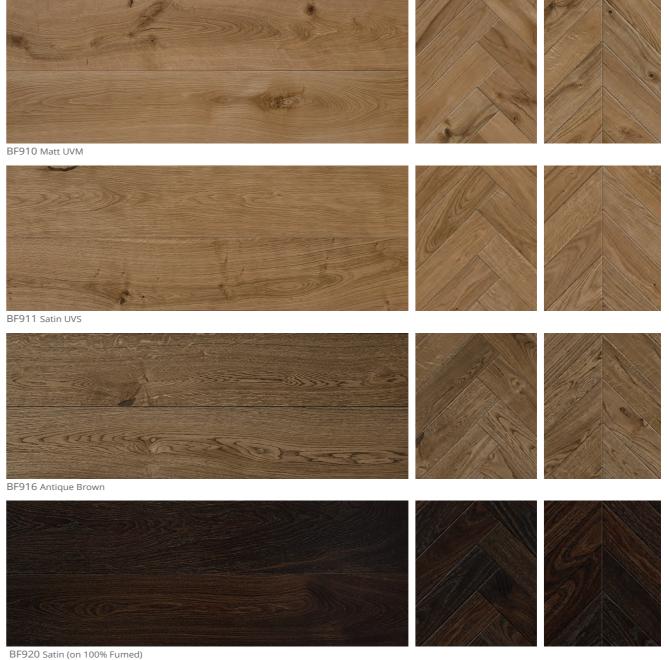

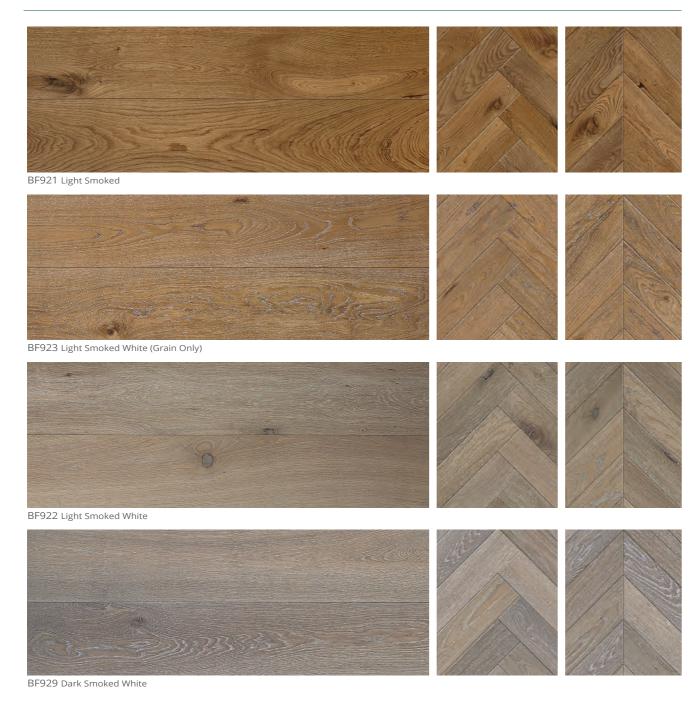

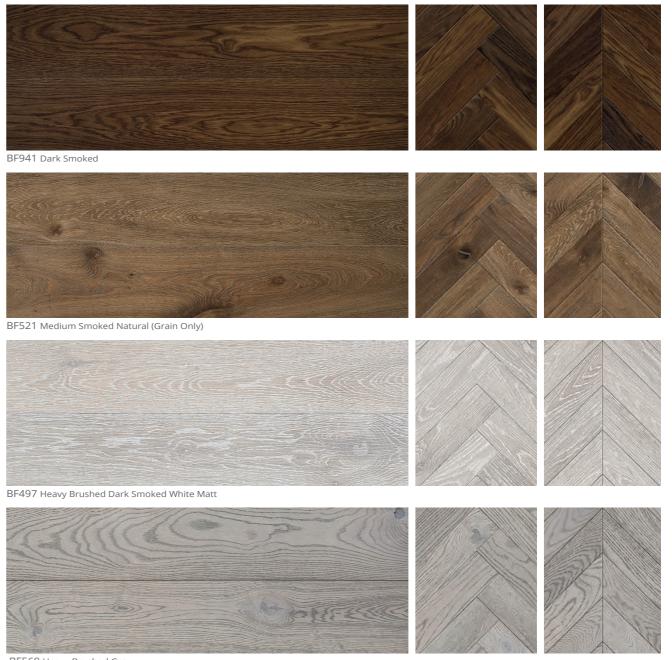

Please note that colour is for representation only, <u>please order a free sample</u>.



BF938 Light Grey



BF939 Dark Grey





BF1975 Medium Smoked & Bespoke Oil



BF1976 Medium Smoked & Bespoke Oil





BF1586 Torched & Light Smoked



BF1587 Torched, Tumbled & Light Smoked





BF1588 Torched, Bandsawn & Light Smoked



Our torched process is only available in our range of plank floors on the long edges, not the short ends, from + £8.00 m².

Call for samples.

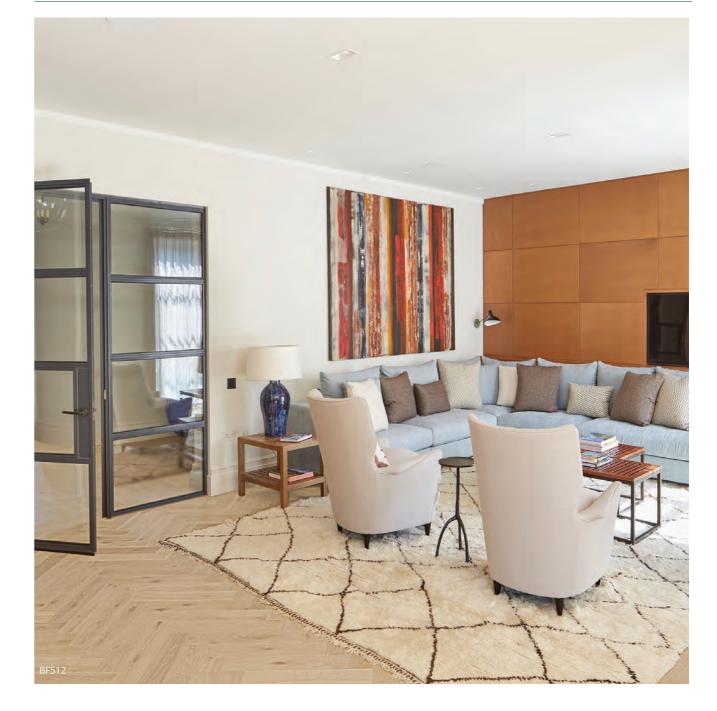

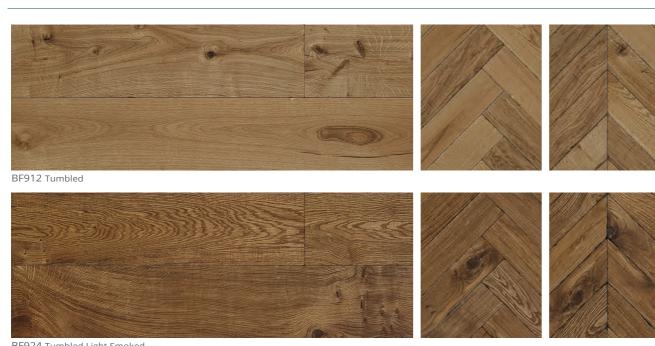





BF943 Tumbled Dark Smoked



Our tumbled texture is available for all the Truly Bespoke wood floor finishes from + £6.00 m² see page 30 for details on tumbling.

Call for samples.





BF919 Tumbled White



BF925 Tumbled Light Smoked White





BF932 Tumbled Dark Smoked White






BF926 Bandsawn Light Smoked



BF944 Bandsawn Dark Smoked



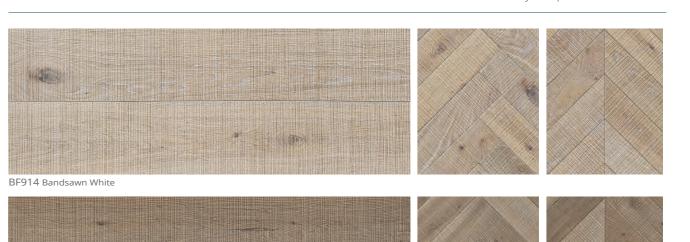

BF419 Bandsawn Light Smoked Sand



BF934 Bandsawn Dark Smoked White




Our bandsawn texture is available with all our Truly Bespoke wood floor finishes + £10.00 m^2 see page 31 for details on our smoking process.

Call for samples.


BESPOKE FLOORING

- Bespoke manufacturing service
- 6/9mm square edged parquet flooring
- 15/20mm T&G flooring
- Any design, any size, any wood species
- Laser cut motifs and borders
- Tumbling/distressing, smoking and prefinishing available for some products
- Approx 4 weeks delivery subject to specification
- ALL bespoke orders are non-returnable

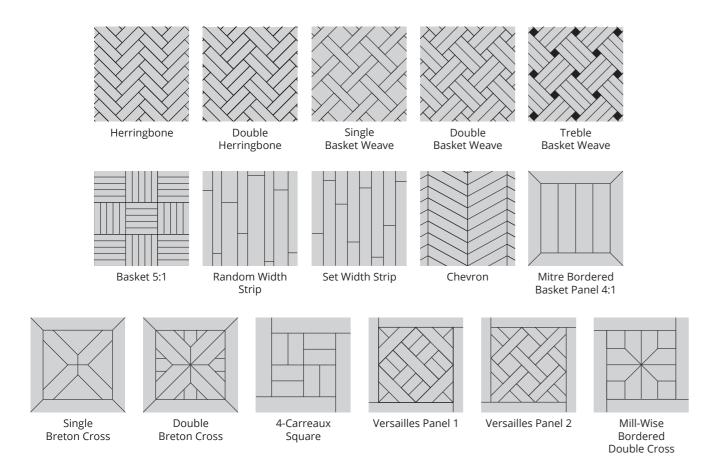

Please note that colour is for representation only, please order a free sample.







Exquisite Oak (Quarter sawn / flatsawn)



Natural Oak (Small to medium size knots)



Rustic Oak (Medium to large open knots)



Jatoba Keruing



Teak



Walnut



Wenge



KÄHRS



- 3 strip lacquered
- Engineered flooring
- 30 Year Warranty

Board Size: 15 x 200 x 2423mm

Pack Size: 2.91m² Finish: Prefinished Wear Layer: 3.50mm **Installation:** Floating





Oak Como 3 Strip - Lacquered

200 x 15mm



Sales Call 020 8501 6730 Delivering 6 days a week



MACHINERY & ACCESSORIES ORDERS PLACED BEFORE 3PM

FREE on orders over £150.00 +VAT £10.00 on orders below £150.00 +VAT

EXPRESS DELIVERY COSTS

Next Day Before 10.30am £30.00 +VAT Next Day Before 12.00pm £25.00 +VAT Saturday Before 10.00am **£40.00** +VAT

NOTE: THE ABOVE PRICES **EXCLUDE** DELIVERIES FOR RECLAIMED FLOORBOARDS AND VARIOUS PRODUCTS WITHIN THE ACCESSORIES SECTION AND WILL BE QUOTED PER ORDER.

ELEGANCE



- Engineered flooring
- 2 sided micro bevelled edges

Thickness: 14/3mm

Length Specification: 1900mm

Finish: Prefinished

Installation: Floating/glued/secret nailed





189 x 14/3mm



Oak Select AB **NEW** Marble Lacquered 189 x 14/3mm



Oak Select AB Filled and Sanded Unfinished

189 x 14/3mm



Oak Select AB Invisible

189 x 14/3mm



Invisible

189 x 14/3mm



UV Oiled

189 x 14/3mm



Oak Rustic Earth Matt Lacquered



Oak Rustic Stone Matt Lacquered



Oak Rustic Granite Matt Lacquered




Slate Matt Lacquered

189 x 14/3mm

189 x 14/3mm

189 x 14/3mm

END GRAIN

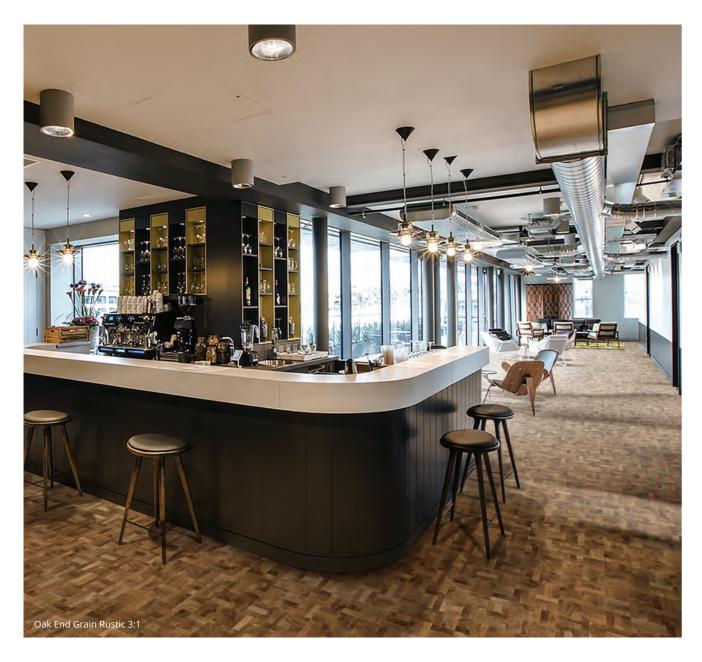

• End grain is also available tumbled as shown on the right - prices on request

FSC/PEFC: Available on request **Delivery Time:** On request

Delivery Cost: On request, subject to quantity

Finish: Unfinished **Installation:** Fully glued

• Please note that sizes may change due to the availability of raw materials





Oak End Grain Nature (3:1 Squares) 60 x 20 x 18mm



Oak End Grain Rustic (3:1 Squares) 60 x 20 x 18mm



Oak End Grain Nature Fumed (3:1 Squares) 60 x 20 x 18mm



85 x 40 x 18mm







Pine



Spruce



85 x 40 x 18mm 88 x 68 x 18mm 88 x 58 x 18mm

88 x 68 x 18mm

MOSAIC PANELS



Profile: Square edged Thickness: 8mm

Size: 120 x 24mm per finger - 480 x 480mm panel

Finish: Unfinished **Installation:** Glued

Pack Size: 10 panels per pack = 2.304m²

this is at the time of going to press and subject to change





European Oak Mesh Backed Panels Unfinished 480 x 480 x 8mm



Mahogany Mesh Backed Panels Unfinished 480 x 480 x 8mm



Sales Call 020 8501 6730 Delivering 6 days a week

MACHINERY & ACCESSORIES ORDERS PLACED BEFORE 3PM

FREE on orders over £150.00 +VAT £10.00 on orders below £150.00 +VAT

EXPRESS DELIVERY COSTS

Next Day Before 10.30am £30.00 +VAT Next Day Before 12.00pm **£25.00** +VAT Saturday Before 10.00am **£40.00** +VAT

NOTE: THE ABOVE PRICES **EXCLUDE** DELIVERIES FOR RECLAIMED FLOORBOARDS AND VARIOUS PRODUCTS WITHIN THE ACCESSORIES SECTION AND WILL BE QUOTED PER ORDER.

PARQUET BATTENS



Profile: Square edged Thickness: 9/10mm Finish: Unfinished

Installation: Glued and pinned to plywood

* French Oak produced to order 2 – 4 weeks





European Oak Prime Parquet Battens

280 x 70 x 10mm 350 x 70 x 10mm



French Oak Quarter Sawn Parquet Battens Unfinished

350 x 70 x 9mm



European Oak Rustic Parquet Battens

280 x 70 x 10mm 350 x 70 x 10mm



French Oak Exquisite Parquet Battens Unfinished

350 x 70 x 9mm



European Oak Prime Fumed Parquet Battens

350 x 70 x 10mm



Wenge Parquet Battens

350 x 70 x 10mm

PARQUET STRIP



Profile: Square edged Thickness: 9/10mm Finish: Unfinished

Installation: Glued and pinned to plywood

Length: 9mm approx 1000 – 2500mm (average 1800mm) 100 x 10mm approx 600 – 2500mm (average 1400mm) 150/180 x 10mm approx 1400 – 2500mm (average 1800mm)

* French Oak produced to order 2 – 4 weeks



European Oak Prime Parquet Strip

100 x 10mm 150 x 10mm 180 x 10mm





French Oak Quarter Sawn Parquet Strip

100 x 9mm 140 x 9mm 180 x 9mm



European Oak Rustic Parquet Strip



French Oak Exquisite Parquet Strip

100 x 9mm 140 x 9mm 180 x 9mm



European Oak Prime Fumed Parquet Strip

180 x 10mm



French Oak Rustic Monastery Parquet Strip

210 x 9mm

PARQUET PANELS



Produced to order

Profile: Square edged Thickness: 9mm Finish: Unfinished

Installation: Glued and pinned to plywood









Oak Exquisite Versailles Parquet Panel 2



Oak Exquisite Mitred Bordered Basket 4:1 Parquet Panel



Oak Exquisite 4 Carreaux Square Parquet Panel



Oak Exquisite Single Breton Cross Parquet Panel



Oak Exquisite Double Breton Cross Parquet Panel



Oak Exquisite Mill Wise Bordered Double Cross Parquet Panel

Also available in the ABOVE wood species in various sizes to order

PARQUET BORDERS

• All Inset Strips and 10mm 2 Line Borders are IN STOCK

• All design Borders are produced to order

Profile: Square edged Thickness: 10/22mm

Length Specification: Random lengths Approx 1200mm – 1500mm

Delivery Time: Approx 4 weeks for design borders









Wenge Inset Strip 10mm x 10mm 22mm x 12mm



10mm 2 Line Wenge & Oak Border



Mahogany Inset Strip 10mm x 10mm 22mm x 12mm



10mm 2 Line Mahogany & Oak Border



Walnut Inset Strip

10mm 2 Line Walnut & Oak Border



Greek Key - 140mm Oak & Sapele Key Square



Greek Key - 140mm Oak & Amazakoue Key Square



Greek Key - 140mm Amazakoue & Oak Key Square



Simplicity - 140mm Amazakoue & Oak Key Square



Grill - 110mm Amazakoue & Oak



Weavered Lines - 175mm Amazakoue, Oak & Sycamore Key Square



Victorian - 175mm Amazakoue, Oak & Sycamore Key Square



Fantasia - 173mm Oak, Sapele, Sycamore & Wenge Key Square



Key Square

Infinity - 63mm Oak, Wenge & Jatoba Key Square



Carnevale - 90mm Oak, Wenge & Jatoba Key Square - N/A



Chain - 110mm Amazakoue & Oak Key Square



Palazzo - 130mm Oak, Wenge & Jatoba Key Square - N/A

62 Call 020 8501 6730 info@wfa.uk.net www.wfa.uk.net

PARQUET MOTIFS

Produced to order


• Supplied in sections marked for installation/assembly

Call for prices

Profile: Square edged Thickness: 10mm

Delivery Time: Approx 2 – 3 weeks



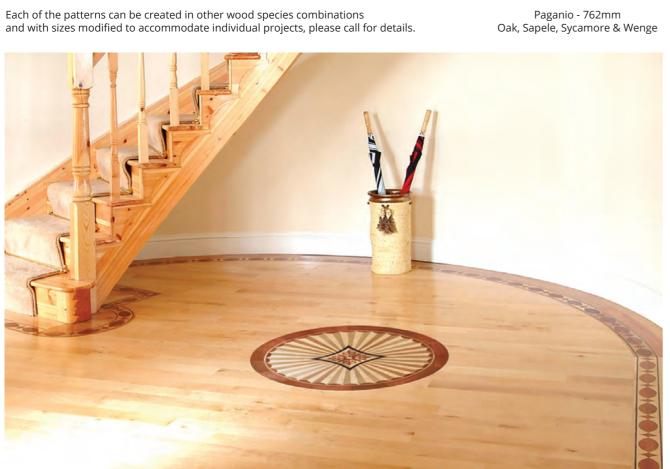

762mm Oak, Wenge



8 Ray Simple 762mm Oak, Amazakoue & Sycamore



8 Ray DF I 1500mm Oak, Amazakoue & Sycamore



8 Ray MQF II 762mm Oak, Sycamore & Wenge



8 Ray MQF I

762mm

Oak, Amazakoue

& Sycamore

Oriental 800mm Wenge & Sapele



8 Ray MQF Square 762mm Oak, Amazakoue, Sapele & Sycamore



Compass I 762mm Sapele, Oak & Wenge



Compass II 900mm Oak, Amazakoue & Sycamore



Black and White & Sycamore



Leaves & Acorns 762mm Oak, Wenge & Sycamore



Neptune 900mm Oak, Amazakoue & Sycamore



Northern Star 762mm Oak, Amazakoue & Sycamore

Paganio 762mm - Oak, Sapele, Sycamore & Wenge

SOLID T&G WOOD STRIP UNFINISHED



Profile: T&G, ends matched and square edged

Thickness: 20mm Finish: Unfinished

Installation: Secret nailed/glued

Length Specification: Random lengths approx 300 – 2100mm







Canadian Maple Select & Better

57 x 20mm

Canadian Maple Select & Better

83 x 20mm



Select & Better

57 x 20mm



American White Oak Select & Better

83 x 20mm



European Oak - Rustic*

120 x 20mm 140 x 20mm

160 x 20mm

180 x 20mm 200 x 20mm

SOLID T&G WOOD BLOCKS UNFINISHED



Profile: T&G all round Thickness: 15/20/22mm Finish: Unfinished **Installation:** Glued









22mm x 12mm Mahogany Inset Strip

22mm x 12mm Walnut Inset Strip

22mm x 12mm Wenge Inset Strip



See pages 103 - 105 for adhesives

European Prime Oak

230 x 70 x 22mm 280 x 70 x 22mm 350 x 70 x 22mm








Wenge Prime









Teak

230 x 70 x 15mm 230 x 70 x 20mm

230 x 70 x 20mm

230 x 70 x 20mm

Please note that colour is for representation only, please order a free sample.

TUMBLED BLOCKS AND BATTENS

Our tumbled blocks and parquet battens provide an authentic aged appearance to suit residential and commercial projects. With subtle surface damage and slightly rounded corners, each piece has its own character to provide a great alternative to reclaimed blocks.

Our solid T&G blocks and battens are tumbled to order

Profile: T&G, square edged **Thickness:** 10/15/20/22mm

Finish: Unfinished

Installation: Glued/glued and pinned to plywood





European Prime Oak Tumbled Solid Blocks 230 x 70 x 22mm 280 x 70 x 22mm 350 x 70 x 22mm



European Rustic Oak Tumbled Solid Blocks 230 x 70 x 22mm 280 x 70 x 22mm 350 x 70 x 22mm



Tumbled Parquet Battens 280 x 70 x 10mm

350 x 70 x 10mm



European Rustic Oak **Tumbled Parquet Battens**

280 x 70 x 10mm 350 x 70 x 10mm



Merbau Prime **Tumbled Solid Blocks**

230 x 70 x 15mm 230 x 70 x 20mm



European Oak Prime Engineered Blocks 350 x 70mm 15/4mm 20/5mm



European Oak Rustic Engineered Blocks 350 x 70mm 15/4mm 20/5mm



Light, Medium & Dark Smoked finish from £6.00m²



Light Smoked



Medium Smoked

Dark Smoked

RECLAIMED FLOORBOARDS

• Widths subject to available stock

Profile: Square edged Thickness: 20mm Finish: Unfinished

Length Specification: Random lengths approx 1200 – 2500mm





175 x 20mm



provides a base for filler Fast & easy to fit

Other widths available

Available in Clear or Brown







Ace & K Multi T-Nailer Nail length 18-64mm Use to fix plywood to concrete



Ace & K 90 Type Stapler Nail length 12-25mm Use to fix plywood to timber.



Ace & K 16g Brad Nailer Nail length 19-64mm Use to fix timber to timber.



Ace & K 16g Angled Nailer Nail length 25-50mm Use to fix architraves, paneling, skirtings and beading.





Omer 90 Type Stapler Nail length 9-32mm Use to fix plywood to timber.



Omer PR18 23g Headless Pin Gun

Pin length 10-18mm Use to fix 6/10mm parquet/ scotia beading and delicate mouldings in place whilst the adhesive cures.



Omer PR28 23g Headless Pin Gun

Pin length 15-28mm Use to fix 6/10/14mm parquet/scotia beading and delicate mouldings in place whilst the adhesive cures.



Bona FlexiSand 1.9 KEY BENEFITS

- 25% greater motor power and heavier weight compared to FlexiSand 1.5
- Easy and ergonomic operation
- Dust containment ready
- Foldable handle
- Big wheels for easy transportation
- Prepared for the Bona Power Drive
- Effective concrete grinding with Bona Concrete Disc

With its powerful 1.9 kW motor and robust construction it runs smooth and cool even under a heavy load. Bona FlexiSand 1.9 is prepared for the Bona Power Drive, a unique drive plate that allows powerful rotary sanding to bare wood.

See Page 76 for attachments.



Bona FlexiSand 1.5 KEY BENEFITS

- · Powerful single-speed motor
- Foldable handle reduces space during transportation
- Large wheels for easy transportation
- Bona Power Drive ready

With its powerful 1.5 kW motor and robust construction ensures stable operation even when under heavy load. Bona FlexiSand 1.5 is compatible with the Bona Power Drive, a unique drive plate that allows powerful, direction free sanding down to bare wood. For optimal dust reduction, the Bona FlexiSand 1.5 is compatible with Bona DCS 70.



Bona DCS 70.

Bona Edge KEY BENEFITS

- High cut rate
- Good reachability
- Effective pickup



Bona Edge XL KEY BENEFITS

- High cut rate
- Easy to handle
- Effective dust pickup
- For both holed discs and Velcro discs
- Easy to carry

Bona Edge XL (220 mm) is an extremely powerful edge sander. It can be fitted with 'holed discs' or Velcro-backed discs and picks up dust better than most edge sanders on the market. It is equipped with a lamp for better visibility and is easy to operate. For optimal dust reduction, the Bona Edge XL is compatible with Bona DCS 70.



Bona Belt Sander KEY BENEFITS

- Powerful wood floor sander
- Ergonomic design with convenient lifting and lowering of the sanding drum
- Easy-start motor
- High weight for powerful sanding
- Infinite pressure adjustment: up to 50% of its weight can be adjusted to the sanding drum
- Easy fitting and changing of paper, no tools needed

All adjustments can be made from the top of the machine and the sanding drum is easily exchanged to another width if needed. The unique drum construction makes changing the abrasive belt a job done in seconds. Bona Belt has a highly efficient vacuum unit that minimizes dust. For optimal dust reduction, connect it to Bona DCS 70.



Bona Belt Lite Sander KEY BENEFITS

- Optimal balance between weight and drum pressure
- Superior manoeuvrability
- Easy fitting and changing of paper
- Low weight of 60 kg
- Infinite pressure adjustment: up to 50% of its weight can be adjusted to the sanding drum
- Can fit distressing drums to texture wood floors on site

All adjustments can be made from the top of the machine and the sanding drum is easily exchanged to another width if needed. The unique drum construction makes changing the abrasive belt a job done in seconds. Bona Belt has a highly efficient vacuum unit that minimizes dust. For optimal dust reduction, connect it to Bona DCS 70.



Bona CombiEdge KEY BENEFITS

- Arm easily replaced for sanding under stairs
- Lightweight construction
- Integrated LED
- Very manoeuvrable
- High sanding and working speed
- Lightweight
- Efficient vacuuming
- Safety operating switch button on the handle

It is equipped with a lamp for better visibility and its shorter sanding arm improves manoeuvrability and reduces strain on arms and hands. For optimal dust reduction, the Bona Edge is compatible with Bona DCS 70.



Bona Belt HD Sander KEY BENEFITS

- High weight for powerful sanding
- Dual speed for optimum sanding results
- Easy fitting and changing of paper
- Can fit distressing drums to texture wood floors on site
- Infinite pressure adjustment: up to 50% of its weight can be adjusted to the sanding drum

The unique dual-speed pulley system and infinite drum pressure adjustment guarantee optimum sanding quality regardless of wood species. It can be easily disassembled into three parts and quickly reassembled. Power, reliability and capability as an effective allaround belt sander. For optimal dust reduction, the Bona Belt HD is compatible with Bona DCS 70.

74 **Call 020 8501 6730** info@wfa.uk.net www.wfa.uk.net

It is equipped with a lamp for better visibility and its shorter sanding

hands. For optimal dust reduction, the Bona Edge is compatible with

arm improves manoeuvrability and reduces strain on arms and





Bona FlexiSand 1.9 KEY BENEFITS

- · Powerful, single phase motor
- Forced driven geared drive
- · Four individually geared grinding pads
- Easy and ergonomic operation
- · Large wheels for easy transportation
- DCS compatible for dust-free sanding
- Multiple drive plate capability



Bona SupraFlex & Accessories

All in one sanding machine for sanding of edges as well as for wire brushing of edges.

KEY BENEFITS

- Powerful 1400 W motor
- Stepless speed selection (600-2100 rpm)
- Dust cover allows connection to Bona DCS for dust free sanding
- M14 tool fixture easy to change between sanding disc to brushes
- Noise reduction



Sales

Call 020 8501 6730

Delivering 6 days a week

Delivery...

Silverstone II Compressor

- Lightweight 11KG
- 5Ltr Tank, 8 Bar Pressure, 115 PSI, 0.50 HP Motor
- Very good noise level
- Oil free & maintenance free
- Compact size 400mm L x 150mm W x 400mm H
- Suitable for headless pin guns, staplers, brad guns & other pneumatic equipment



ON MACHINERY & ACCESSORIES

Saturday - Before 10.00am **£40.00** +VAT

ORDERS FOR STOCK ITEMS PLACED BEFORE 3PM

Standard Next Day - Business Hours **FREE** on orders over £150 +VAT Standard Next Day - Business Hours £10.00 +vat on orders below £150 +vat

Next Day - Before 10.30am **£30.00** +VAT Before 12.00pm **£25.00** +VAT

NOTE: The above prices <u>exclude</u> deliveries for RECLAIMED FLOORBOARDS, BATTENS

dependent on quantity, UNDERLAYS, PRO CARD, PLYWOOD, HARDBOARD AND SOME ADHESIVES. These products will be quoted per order due to either their size, weight or

Extreme 3T Compressor

- Lightweight 19KG
- 5Ltr Tank, 10 Bar Pressure, 145 PSI, 1.50 HP Motor
- Very good noise level
- Oil free & maintenance free
- Compact size 550mm L x 340mm W x 380mm H
- Suitable for headless pin guns, staplers, brad guns & other pneumatic equipment



Bona Power Drive

Used exclusively with the Bona FlexiSand 1.5 & 1.9 for sanding down to bare wood.



Bona Power Drive NEB

Used exclusively with the Bona FlexiSand machines.



Bona FlexiSand 4 Head Quattro Disc

Perfect for reducing/smoothing out drum marks and rotational scratches from edger machines.



Bona FlexiSand Concrete Disc

Basic drive plate for fitting different types of sanding segments with magnetic fixing for quick and easy change overs.



Bona Concrete Diamond Segment

For removing the sinter layer from levelling compounds and or screeds - other segments available.





25ft Hose & Quick Release **Fitting**



EXPRESS DELIVERY COSTS

flammability properties.

Y Piece Connector

Connect 2 Hoses, universal and PCL.

Spare Parts Available



the Bona Multidisc creates an exceptionally smooth and flat

Bona FlexiSand 6 Head Multidisc With its six-plate construction, surface finish.



76 Call 020 8501 6730 info@wfa.uk.net www.wfa.uk.net







Diamabrush Clutch

Universal 5" plates for use with buffing machines. As shown left Numatic, middle Tru-Fit and right Whirble.



Replacement Blade Kit

For mastic removal tool.



Replacement Blade Kit For hardwood prep tool.



16" Diamabrush Mastic Removal Tool 25g

Designed to remove stubborn coatings from concrete such as mastic, carpet or tile adhesive, thin-set and thin coatings like urethane or paint. Easy to use without heavy grinding equipment or harmful chemicals, mounts to any standard floor buffer or auto scrubber and uses diamond coated blades to grind tough coatings away!



15" Diamabrush Hardwood Prep Tool 50g **KEY BENEFITS**

- · Blades feature 2 cutting edges
- Available in sizes from 305mm - 508mm
- Designed to fit a wide variety of rotary floor machines
- · Removes polyurethane, varnishes and even hard to remove coatings such as carpet or tile glue residue

Blades feature 2 cutting edges. When diamonds wear on one side, simply turn the blades and use cutting edge on other side. Ideal for the toughest removal jobs on hardwood floors. Will not gouge wood or leave heavy scratches on floor surfaces. Low-profile design enables the tool to travel seamlessly over heat registers carved out in the floor.







fidbox M V6 C€

Chargen / Serienny



Available






THE Electronic Monitoring System for the flooring industry helping protect floors and reputations against:












WOOD FLOORS + UNDERFLOOR HEATING = USE FIDBOX



Hmbox & Replacement Adhesive

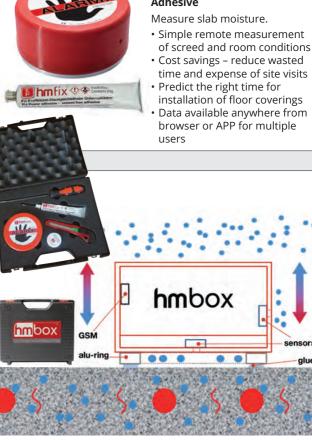

Know site conditions without having to visit site Through the web-based solution the measurement results can be retrieved at any time. Corrective action can be quickly taken to create an optimum climate on the construction site for the installation of floor covering.



SCREEDS + DIGITAL MEASURING = USE HMBOX









Fein Dustex 25 L Wet / Dry **Dust Extractor**

110/240V

Compact, powerful wet / dry dust extractor for connecting to power tools when working on site.



Fein Dustex Replacement Dust Bags 25 L

5 x fleece filter bags for use with Fein Dustex 25 L above. Tear-resistant bags work with the cartridge filter to ensure the collection of debris, for wet or dry use and non-reusable.



Fein MultiMaster Starlock Sanding Pad 'SL'

Plastic carrier plate for preventing damage and marks on the workpiece. Triangular shape, hook and loop fastening. Perforated version for sanding with dust extraction.



Fein Sanding Sheets 40g/60g/80g/100g

Also available in the perforated version, please ask.



Fein Starlock Blades

35mm & 65mm for the MulitMaster. Tool changes possible in just 3 seconds!



Fein MultiMaster Depth Stop

Depth stop for all saw blades. For accurate working at depth. Effective protection for blade and workpiece.



Universal fitting - For Fein, MultiMaster, Bosch, Makita, DeWalt & Milwaukee Multi Tools



Surebuild Delta Sanding Pad 80mm



Surebuild Bi-Metal Flush Cut **Precision Hardwood Wood** Blade

32mm



Surebuild CRV - Wood Blade 68mm



Surebuild CRV - Wood Blade 34mm



Surebuild CRV - Wood Blade 87mm



Surebuild Bi-Metal Plunge **Cut Wood & Metal Blade** 65mm

80 **Call 020 8501 6730** info@wfa.uk.net www.wfa.uk.net





Cuts up to 55mm. Use to cut Perimeter Borders.





Includes

- FS1400mm guide rail
- splinterguard
- universal saw blade
- hex key, WAF 5

Cuts up to 75mm. Use to cut Perimeter Borders.



TSC55 Li 5,2 REB - Set/XL **FS Cordless Plunge Saw**

110/240V

Includes

- · Guide rail & splinterguard
- 2 airstream battery packs
- 2 rapid chargers
- fine tooth saw blade
- hex key, WAF 5

Cuts up to 55mm. Use to cut Perimeter Borders.




Festool Guide Rails

Available in 3 different lengths 800, 1400 and 2400mm, please call for other sizes available.



Festool Guide Rail Connector

Joins two tracks together.



Festool Guide Rail Splinter Guard

Transparent replacement splinter guard for guide rails FS1400 and FS5000.



Festool Guide Rail Adhesive Cushion Strip

10m roll, replacement adhesive cushion strip for FS and FS/2 guide rail.



FESTOOL Tools for the toughest demands

Festool Fine Saw Blades TS55 48 Tooth & TS75 52 Tooth

Cutting width 2.20mm. For clean and splinter-free cross cuts in solid wood.



Festool Fastening Clamp FSZ 120

Clamping width 120mm for securing the guide rail in place. Two in the pack.



Festool Padded Guide Rail Bag



Includes

- 2 airstream battery packs
- 1 rapid charger
- CENTROTEC tool chuck
- CENTROTEC bit holder



Festool CXS Li 2.6 Set GB **Cordless Drill**

Includes

- 2 battery packs BP-XS
- charger MXC
- CENTROTEC tool chuck
- CENTROTEC bit holder
- FastFix keyless chuck 10 mm
- XS elbow adapter
- bit PZ 2
- in SYSTAINER SYS 1 T-LOC



Festool Guide Rail Deflector

Prevents suction hoses and cables from catching on the end of the guide rail.



Festool Centrotec Pozidrive Bit Box + BH 60-CE



Festool Slideway Lining



10m





Festool OF 1010 Guide Rail Adapter

Complete with support, for use of routers with the FS guidance system, without rods.



Festool Guide Rail FS 1400

Safe, perfectly straight power tool guidance, splinterguard for splinter-free sawing, length 1400mm.



Festool OF 1400 Guide Rail Adapter

With fine adjustment and support for router without guide rods, without rods.



Festool EHL 65 Replacement Blade.



Festool EHL 65 Dust Bag.

Festool OF 1010 EBQ Plus

110/240V



Includes

- chip deflector
- Ø^{1/}4" clamping collet
- side stop
- open ended spanner, WAF 24
- guide rail adapter
- in SYSTAINER SYS 3 T-LOC

For routing profiles, grooves, rebates and dovetail joints and routing depth adjustment to 1/10mm.

Festool OF 1400 EQ-Plus

110/240V



Includes

- chip deflector
- Ø^{1/}4" & Ø^{1/}2" clamping collet
- side stop with fine setting
- copying ring Ø 30 mm
- extraction hood, top
- open ended spanner, WAF 24
- in SYSTAINER SYS 4 T-LOC
- 70 mm routing stroke and

routing depth adjustment to 1/10mm.

Festool EHL 65 EQ Plus Planer

110/240V



Includes parallel side fence

- hex key, WFA 2
- in SYSTAINER SYS 2 T-LOC

Maximum 4mm planing depth and 23mm rebate depth for more speed and flexibility. Efficient dust extraction at the left/right side no clean-up needed.





Festool Domino DF500 Q-Plus Joiner

110/240V

• DOMINO cutter D5 • open ended spanner, WAF 8 • in SYSTAINER SYS 2 T-LOC

Includes

Varied use with dowel sizes from 4 x 20mm to 10 x 50mm.



Includes

- DOMINO cutter D12
- empty dowel box
- open ended spanner, WAF 12
- in SYSTAINER SYS 5 T-LOC

Maximum stability of joints up to a DOMINO size of 14 x 140mm.



Base for mitre, undercuts, and angled cuts from +45° to -45°, stepless angle adjustment, fits Festool 400/420 jigsaws.



Festool Carvex PS420 EBQ-Plus Jigsaw

110/240V

 splinterguard • in SYSTAINER SYS 1 T-LOC

Includes

saw blade



Festool Pendulum

Jigsaw Trion PS300

• patented three-way saw blade guide for cutting 110/240V precise angles

splinterguard

Includes

• in SYSTAINER SYS 1 T-LOC



Festool Carvex PSBC420 EB-Plus Cordless Jigsaw

Includes saw blade

- splinterguard
- BP 18 Li 5.2 AS battery pack
- SCA 8 rapid charger
- in SYSTAINER SYS 2 T-LOC

Low weight 2.4 kg.





Festool Cleantex CTL 26 Mobile Dust Extractor

110/240V



Includes

- SELFCLEAN filter bag
- · smooth suction hose dia. 27/32 x 3.5 m AS/CT
- · hose and cable holder
- SYS-Dock with T-LOC function
- · bluetooth® module for remote control on the suction hose or automatic start via the bluetooth® battery pack

Container/filter bag capacity 26/241

See page 89 for leaning

Festool CTL Midi Bluetooth® Includes

Mobile Dust Extractor · bluetooth® functionality for

110/240V

- extractor, remote swith-on for cordless tools
- · hose and cable holder
- SELFCLEAN filter bag
- · smooth suction hose dia. 27/32 x 3.5m AS/CT
- SYS-Dock with T-LOC function

Container/filter bag capacity 15/12.5L

Festool Rotex RO90 DX FEQ-Plus

110/240V



Features

- FastFix sanding pad system, tool-less
- Sanding up to the edge thanks to the Festool PROTECTOR
- Four tools in one: for coarse/fine/delta sanding and polishing. Resulting in low investment costs and savings on working time

weight < 1.5 kg

Festool Rotex RO125 FEQ-Plus





Features

- FastFix sanding pad Ø 125 mm (soft-HT)
- Sanding up to the edge thanks to the Festool PROTECTOR
- in SYSTAINER SYS 2 T-LOC
- weight <1.5 kg

Festool CTL SYS Extractor 230V



- fitted filter bag suction hose
- hose holder
- SYS-Dock with T-LOC function

Approval for dust class L, only suitable for dry extraction, container/filter bag capacity 4.5/3.5L

Festool Rotex RO150 FEQ-Plus 110/240V





Features

- MULTI-JETSTREAM 2 FastFix sanding pad Ø 150 mm (soft W)
- Sanding up to the edge thanks to the Festool PROTECTOR
- in SYSTAINER SYS 3 T-LOC





Festool Sanding pad RO90 DX

Delta sanding pad plate for attaching StickFix sanding pads soft and hard.



Festool Rotex RO125 Pad Ultra Soft/Soft/Hard



Festool RO90 Delta Backing Plate

Component with StickFix coating onto which sanding pad is secured.



Festool Rotex RO150 Soft Sanding Pad

FastFix, soft version. For universal use on plain and arced surfaces.



Festool RO90 Delta Sanding Pad

Soft/Hard

StickFix adhesive layer for quick change of sanding pad, hard or soft versions with snap stud.



Festool Rotex RO150 Hard Sanding Pad

FastFix, hard version. High edge solidity, for plain surfaces and narrow edges.



Festool CT 26 Dust Extractor Longlife Bag

Used for extraction of dust types not hazardous to health and not recommended for fine dust.



Festool CT 26 Dust Extractor Filter Bag

For extracting dust with the CTL26 with Autoclean function.



Festool CTL Midi Longlife Filter Bag


Used for extraction of dust types not hazardous to health and not recommended for fine dust.



Festool Selfclean Midi Filter Bag Original/New Model

High-quality cloth filter bag, cleans dust deposits inside the filter bag automatically.







Includes

- · workpiece clamp
- hex key, WAF 6
- in carton

FastFix saw blade changing for adaptation to the working material with twin-column guide for accurate cuts.

Festool Kapex KS120 EB



Includes

- **Sliding Compound Mitre Saw** HW universal saw blade W60
 - bevel
 - workpiece clamp
 - operation tool
 - in carton

FastFix saw blade changing for adaptation to the working material with twin-column guide for accurate cuts and Safety brake.

Festool Kapex Underframe Features Complete set



- convenient transport on building and installation sites
- simple folding in for transport
- Simple fitting of trimming attachments
- Integrated meas, scale and adjustable stop permit exact repeat cuts
- weight 21.00kg
- work height 900mm


Festool Kapex Underframe Features



- convenient transport on building and installation sites
- simple folding in for transport
- weight 13.00kg
- work height 900mm

Festool 4m Plug IT Cable

rubber insulated cables 110V Yellow 240V Green





• HW universal saw blade W32

- angle stop
- ripping-cut fence
- sliding table
- extension table
- extension table
- foldaway legs
- splinterguard
- dust extraction set
- workpiece holder
- operation tool





Festool Systainer




Box 2 Dimensions (L x W x H) 396 x 296 x 157.5mm Weight 1.50kg

• 1x cover for label field



Festool Sortainer

Dimensions (L x W x H) 396 x 296 x 210mm For storage in drawers: Small parts such as nails, dowels or screws can be stored just as neatly as hand tools.





Box 3 Dimensions (L x W x H) 396 x 296 x 210mm Weight 1.80kg

• 1x cover for label field



SYS-Roll

- transportation of SYS Classic and SYS T-LOC
- extra large wheels (D 200mm)
- for easy transportation up and down steps
- · rotating lockable front rollers manoeuvre in all directions



Festool Systainer

Box 4 Dimensions (L x W x H) 396 x 296 x 315mm Weight 2.10kg

• 1x cover for label field



Festool Compact Cleaning Set

- curved hand tube D 36 HR-K AS • extension pipes D 36 VR-K AS
- 4-piece floor nozzle D 36 BD270
- crevice nozzle D 36 FD-210
- in SYSTAINER SYS 1 T-LOC



Festool Systainer

Box 5 Dimensions (L x W x H) 396 x 296 x 420mm Weight 2.70kg

• 1x cover for label field



Festool Tradesman Cleaning Set

- smooth suction hose D 36
- curved hand tube D 36 HR-K AS
- extension tube, special steel 3-piece D 36 VR-M3x
- crevice nozzle D 36 FD-210
- suction brush D 36 SP
- in SYSTAINER SYS 5 T-LOC



Chalk Hog 30m/100ft & 4.oz Blue Chalk



Chalk Refill 227g (8oz) Blue



Scangrip Nova 3KC+R Work Light



Superbar 380mm t With 'Shepherd's Crook' rocker head for max prying power. Perfect for prying mouldings,

scraping and pulling nails.



Screeding Trowel Soft Grip Handle 14in x 4in



Hanson Hard Lead Pencil



Roughneck Tapping Block 480mm - Designed to knock wood flooring planks together in order to ensure perfect fitting. Use with a mallet.



Roughneck Pulling Over Tool 520mm - Pulls wood flooring planks together to ensure a neat flush finish.



Euro Filling Knives



Filler & Spreader Set Stainless Steel




Estwing Straight Claw Hammer Vinyl Grip 560g (20oz)



Bosch Jigsaw Blades T101AO T101D T144D




Irwin Marples MS500 All Purpose Chisel ProTouch Handle





Bessey AV2 Adjustable Floor Spacer



Bessey SVH400 Ratchet Flooring Clamp 4m



Irwin 990UHP Fine Handsaw 550mm 9tpi Soft Grip



Irwin 770UHP Coarse **Hardpoint Handsaw** 550mm 7tpi Soft Grip



Nail Punch Yellow - 0.8mm 1/32 in Blue - 1.6mm ^{1/}16 in Red - 2.4mm ^{3/}32 in



Roughneck Nail Punch Yellow - 0.8mm ^{1/}32 in Blue - 1.6mm ^{1/}16 in Red $- 2.4 \text{mm}^{3/32} \text{ in}$





TCT Scraper 20mm Soft Grip Handle



TCT Scraper Replacement Blade



Bahco 650 Power Scraper



Bahco 665 Paint Scraper



Wooden Handled Folding Pocket Knife



Bahco 442 Scraper Blade



Recoil Knee Pads

Scientifically proven to reduce peak pressures on the knee by up to a staggering 76%



For all other Recoil Knee pad accessories give us a call!



Recoil Knee Pad Replacement Covers Suitable for all existing knee pad types.




WFA 10m Tape Measure



Includes (also sold separately)

- Industrial Bar Insert for Carpet
- Industrial Brush Insert for Floors
- Industrial Rubber Bar Insert for Liquids
- Replacement L Class Filter, DV20/35
- · Crevice Tool, 45mm
- Round Brush
- Suction Hose with Swivel Connections 2.5m x 45mm, DV20/35
- Suction Hose with Stepped Power Tool Adaptor, 4.0m x 36mm, DV20/35
- Floor Bar Housing
- 45mm Plastic Wand for Dura Range 2pcs set



Including Floor Bar, Hose and Tools 100/240V.





It has up to 1300watt power take off with auto run and filter clean with a dual power motor. Fitted with castors using non-mark wheels means it can be used on a variety of surfaces. The drum is extremely tough and can withstand the toughest of treatment, the motor housing is also very tough and can withstand impact.

Features

- Power take off up to 1300w
- Reduces need for extension leads and power supplies
- Filter type cartridge
- Power cord length 7m
- Capacity 20ltrs
- Dimensions (L x W x H) 410 x 420 x 600mm
- Weight 9.6kg



Maxvac Dura Assembly Drum Fleece Bags, L Class



Maxvac Stepped **Power Tool Adaptor**

Use this adaptor to attach the hose to most Festool tools.



92 Call 020 8501 6730 info@wfa.uk.net www.wfa.uk.net





Leica DISTO D2-BT **Laser Distance Measurer** with Bluetooth



The D2 measures from its base by default and can be configured to measure from the front.

- Range up to 100m
- Press a button & get an instant measurement on screen
- Typical accuracy +-1.5mm
- 10 Value memory
- IP54 dust & splash water protected
- · Multi-functional endpiece fits into corners for accurate diagonal measurements

The endpiece is an integral part of the tool, connected to the circuit board. In the closed position the DISTO™ knows to measure from its base. Flip it open 90 degrees to align the base perfectly on an edge or corner. Flip it out all the way and you can put this baby in a corner to accurately measure diagonals. Otherwise, the width of the base would prevent you from getting all the way into the corner, rendering the measurement inaccurate.

Leica DISTO X3 **Rugged Laser Distance** Measure with Bluetooth



The Leica DISTO X3 is perfect for tough construction site conditions. It is drop-tested up to 2 m in height, water jet and dust protected to IP 65 standards.

It allows you to measure distances between any two points from one position.

- Range up to 150m
- Tilt sensor
- Typical accuracy +-1mm
- 20 Value memory
- IP65 dust tight & water jet protected
- Multifunctional end piece with auto recognition

The Leica DISTO™ X3 display automatically rotates in line with the measurement direction. This means you can always read your measurement results from any angle. This device is designed to make indoor laser measurements an easy task. A holster, hand loop and batteries are included.



Our LCD Temperature & Humidity device allows your customers to monitor room temperature and humidity and ensures they are maintained within the recommended guidelines.

LCD Thermometer & Hygrometer

- Temperature measuring range 0 60°C
- Humidity measuring range 20% 95%
- Memory of minimum & maximum value for readings

Educating your customers and reducing complaints.

By identifying when the readings are too high or low your customer will be able to notify you before problems arise or get any worse.

ON MACHINERY & ACCESSORIES Standard Next Day - Business Hours FREE on orders over £150 +VAT

Standard Next Day - Business Hours £10.00 +vat on orders below £150 +vat

Sales 020 8501 6730 Delivering 6 days a week

ORDERS FOR STOCK ITEMS PLACED BEFORE 3PM

EXPRESS DELIVERY COSTS

Next Day - Before 10.30am £30.00 +VAT Before 12.00pm £25.00 +VAT Saturday - Before 10.00am £40.00 +VAT

NOTE: The above prices **exclude** deliveries for RECLAIMED FLOORBOARDS, BATTENS dependent on quantity, UNDERLAYS, PRO CARD, PLYWOOD, HARDBOARD AND SOME ADHESIVES. These products will be quoted per order due to either their size, weight or flammability properties.





Protimeter - Timbermaster Standard Kit

Includes

- Heavy duty probe
- Calibration check device
- Zip Pouch
- Calibration chart 150 species
- 2 x AA batteries



Protimeter - Mini Moisture Meter

20 Coloured lights to indicate moisture level in timber.

Includes

- Extension pin probe
- Calcheck device
- Pouch with belt loop
- 2 AA batteries



Protimeter - Humidity Sleeve

16 x 43mm humidity sleeves for Protimeter MMS 2 or Hygromaster. Use to measure equilibrium RH value of walls and floors by inserting into predrilled holes.



Protimeter - Humidity Box

Allows surface RH tests on concrete subfloors.



Protimeter - MMS 2

Includes

- Quikstick Short
- Heavy duty moisture probe
- Calcheck device
- Operators Instructions
- 9v battery
- Pouch

For testing moisture in timber, concrete and atmospheric conditions.



Protimeter - Surveymaster

Includes

- Protimeter Surveymaster
- Protective Pouch
- 2 x AA Batteries
- Heavy Duty Extension lead
- 120mm Deep Wall Probes
- · Self Calibration Check
- Wood Species Chart

Scan search for moisture in walls/floors to a depth of approx 19mm.



Protimeter - Aquant

Includes

- Protimeter Aquant
- Protective Pouch
- 2 x AA Batteries

Scan search for moisture in walls/floors to a depth of approx 19mm.



10.2-



Tramex PTM 2.0 & HH14TP30 **Wood Inspection Kit**

Pin type moisture meter for wood, 6 - 46% digital readout to 0.1% accuracy. Calibration for 500+ wood species.



Tramex Infrared Surface Thermometer

Features a laser target pointer to gain instant readings on almost any surface from a distance.



Tramex Flooring EZ Kit CMEX II

Digital version of the Tramex CME 4. for fast, non-invasive and accurate moisture content measurements in solid floors and screeds including concrete.

- · Fastest, most reliable, Hygro-i ® RH probe for testing to BS 8201 & ASTM F2170.
- Instant concrete moisture content test from 0 - 6.9% with CMEX II to ASTM F2659



Tramex CME 4 Concrete Encounter

Instant test for concrete with precise readings to a depth of approx. 20 mm (3/4") into the slab.



Tramex Pin Type Wood Probe HH14TP30

Wood probe with cable & pins for use with CMEX II, MRH3 & PTM.



Tramex Hygrohood with Tape

Non-destructive relative humidity testing of concrete flooring slabs and screeds. Ideal for use with the Tramex CME 4.



Tramex Hygrohood Tape 15m Roll



Tramex Humidity Box

For testing RH in concrete. Use in conjunction with CMEXpert



Tramex Calibration **Check Plate**

Ideal for use with the Tramex CME 4.

Bulk discounts available on Hermes call for details



Belts		Unit	Zirconia	Ali Oxide
8" / 200mm x 750	mm Cloth Belts			
24G	Hermes 200 x 750 Cloth Belts " " " Commonly purchased for the; Lagler Elf, Hummel & Profit			
10" / 250mm x 75	Omm Cloth Belts			
24G 36G	Hermes 250 x 750 Cloth Belts" " "	10 10		
80G 100G	Commonly purchased for the; Bona Belt	10 10 10 10		

	Velcro Orbital Discs	Unit	Price
	Festool R090		
	40G Hermes Festool R090 Velcro Discs 7 Hole		
	60G"		
	80G"		
	100G"		
	Festool R0125		
A STATE OF	40G Hermes Festool R0125 Velcro Discs 9 hole		
	60G"		
	80G"		
	100G"		
	Festool R0150		
	40G Hermes Festool R0150 Velcro Discs 9 hole		
	60G"		
	80G"		
	100G"		
	120G"		
	150G"		



Hermes Discs		Unit	Zirconia Silicon Carbide
16G	Hermes Velcro Discs - 150mm	50	
24G	п	50	
36G	п	50	
40G	п	50	
50G		50	
60G	Commonly purchased for the;	50	
80G		50	
100G	Lagler Elan & Flip Edge Sander	50	
120G		50	
 16G	Hermes Velcro Discs - 180mm	50	
24G	п	50	
36G	п	50	
40G	п	50	
50G		50	
60G	Commonly purchased for the;	50	
80G	Bona Edger - K&T Pegasis	50	
100G	Lagler Unico	50	
120G		50	
16G	Hermes Velcro Discs - 200mm	50	
24G	п	50	
	п		
40G	п	50	
50G		50	
60G	Commonly purchased for the;	50	
80G	- · · · · · · · · · · · · · · · · · · ·	50	
100G	Lagler Trio	50	
120G		50	

Screening Mesh Discs	Unit	Price
60/80/100/ 17" Hermes Buffing Mesh Discs		

Polishing Pads	Unit	Price
Red Non G17" Hermes Buffing / Polishing Pad		
White Non G"		
Black 80G"		

Ali Oxide

Belts

16G	Bona 200 x 750mm Cloth Belts	10	
24G		10	
36G	ш	10	
	"		
50G		10	
50G	Commonly purchased for the;	10	
30G	Lagler Elf, Hummel & Profit	10	
100G	Lagier Ell, Hullillier & Prolit	10	
120G		10	

Unit

Zirconia

10" / 250mm x 750mm Cloth Belts

16G	Bona 250 x 750mm Cloth Belts	10	
24G		10	
36G	"	10	
40G	ш	10	
50G		10	
60G	Commonly purchased for the;	10	
80G	Bona Belt	10	
100G	Lagler Super Hummel	10	
120G		10	



8" / 200 x 550mm Cloth Belts (Flexi Drum) Ali Oxide only

16G	Bona 200 x 551mm Cloth Belts		
24G	ш	10	
36G	п	10	
	"		
50G		10	
60G	Commonly purchased for the;	10	
80G		10	
100G	DONA FIEXIGIAITI	10	
120G		10	

	Bona Discs		Unit	Zirconia Silico	on Carbide
	16G	Bona Velcro Discs - 150mm	50		
		"			
		п			
		"			
•	50G		50		
	60G	Commonly purchased for that	50		
	80G		50		
	100G		50		
		Bona Velcro Discs - 178mm			
	24G	"	50		
		п			
		"			
•	50G	Cananaani, musebaaaad fartha.	50		
	60G		50		
	80G	0	50		
	100G	Lagler Unico	50		
	120G		50		
	16G	Bona Velcro Discs - 200mm	50		
		ш			
	36G	ш	50		
		Ш			
	50G		50		
	60G	Commonly purchased for the;	50		
	80G	3 .	50		
	100G	Lagiel III()	50		
			50		
		Bona Double Sided Sanding Disc 16"			
		"			
	366	"			
		"			
	50G		Each		
	60G	commonly parenasea for ane,	Each		
	80G	BODA BUILLE & FLEXIZADO	Each		
	100G		Each		
	120G		Fach		









Adesiv Pelpren PL6 10kg

2 component, beige and brown epoxy/PU for gluing 10mm parquet flooring to concrete/ timber. Compatible with underfloor heating.

Coverage Approx 1kg/m²



Adesiv Pelpren R-R 1kg

2 component, water-free polyurethane adhesive for the rapid gluing of any kind of wood floor repair/small area to concrete/timber.



Adesiv WB Mono MS 600ml

Flexible adhesive for gluing all types of wood floors to concrete/timber. Compatible with underfloor heating Coverage Approx 1m²



Adesiv WB Mono MS 15kg

Flexible adhesive for gluing all types of wood floors to concrete/timber. Compatible with underfloor heating Coverage Approx 12m²



Adesiv Adegloss 10 250ml

Injectable PU Adhesive. This is a hygro-hardening expanding polyurethane resin, used before and after the installation of flooring. It has a UNIQUE swelling characteristic that allows the filling of empty spaces.





Sales 020 8501 6730
Delivering 6 days a week

*Subject to delivery terms



ORDERS FOR STOCK ITEMS PLACED BEFORE 3PM ON MACHINERY & ACCESSORIES

Standard Next Day - Business Hours **FREE** on orders over £150 +VAT Standard Next Day - Business Hours **£10.00** +VAT on orders below £150 +VAT

EXPRESS DELIVERY COSTS

Next Day - Before 10.30am **£30.00** +VAT Before 12.00pm **£25.00** +VAT Saturday - Before 10.00am **£40.00** +VAT

NOTE: The above prices exclude deliveries for RECLAIMED FLOORBOARDS, BATTENS - dependent on quantity, UNDERLAYS, PRO CARD, PLYWOOD, HARDBOARD AND SOME ADHESIVES. These products will be quoted per order due to either their size, weight or flammability properties.

102 Call 020 8501 6730 info@wfa.uk.net www.wfa.uk.net



For next day delivery of Bona adhesives call and order before 10am





Bona R850 Adhesive 15kg

A hard-elastic 1 component silane adhesive. Suitable for all types of wood flooring. Its hard-elastic properties make it strong and resistant against movement of wood while relieving tension on the sub floor. Compatible with underfloor heating. Coverage 850-1500g/m²



Bona R848 Adhesive 15kg

An elastic 1 component silane wood floor adhesive. A high performance formulation that is ideal for the installation of engineered wood flooring. Can also be used for solid boards up to 190mm wide. Compatible with underfloor

Coverage 850-1250g/m²



Bona R590 Silane Based **Moisture Barrier 8kg**

A water and solvent free silanebased compound for priming and/or sealing residual moisture in the substrate. For reinforcing weak subfloor surfaces up to a certain level. Flooring can be installed as soon as 4-6 hours after application. Compatible with underfloor heating.

Coverage 500-1000g/m²





Bona R410 Primer/Moisture Barrier 5kg

A solvent and water-free, 2 component epoxy resin, suitable for damp proofing concrete or cement subfloors – or for use as a primer prior to the application of a suitable adhesive or levelling compound. Two coats are required when used as a damp proofer - allow 3 hours between coats. Drying time: 24 hours.



Bona Titan 15kg

A silane based adhesive, it has a 'quadruple crosslinking' formulation that delivers ultimate durability and the fast possible bonding. Keeps even the largest solid boards in place. No discolouration or hollow spots. No primer required.

Coverage 850-1500g/m² depending upon type of flooring being installed.



Wakol

Wakol MS260 Plus Adhesive

Firm-flexible, premium 1 component MS Polymer adhesive for gluing T&G flooring to concrete/timber. Can be used with underfloor heating.

Coverage Approx 12-14m²/unit



Wakol MS228 Ready-To-Lay Parquet Adhesive 18kg

Elastic, 1 component parquet adhesive for engineered floors only, for laying on absorbent and non-absorbent subfloors. Can be used with underfloor heating.

Compatible with MS330 only.

Coverage Approx 12-14m²/unit



Wakol MS230 Adhesive 18kg

Flexible, premium 1 component MS Polymer adhesive for gluing engineered flooring to concrete /timber. Can be used with underfloor heating.

Coverage Approx 12-14m²/unit



Wakor

Wakol 4535 Additive 0.15kg (Brown)

Brown colour paste to stain PU225 Adhesive below.



Lecol 5500 Adhesive Spirit Based 16kg/25kg

Water free, spirit based rigid set adhesive for wood blocks, plywood, mosaic panels and parquet up to 90mm wide. Coverage Approx 12m²/16kg Coverage Approx 19m²/25kg



Wakol PU225 Adhesive 6.75kg (Beige)

2 component PU For gluing 10mm parquet flooring and mosaics. Can be used with underfloor heating.

Coverage Approx 6m²/unit





Wakol MS262 Adhesive Sausage 600ml

Solvent free modified saline adhesive for engineered & solid wood flooring up to 180mm. Suitable for underfloor heating. Coverage Approx 1m²/sausage



Bona R880 Silane Based Adhesive 310ml

Ready to use, fast drying, silane based adhesive suitable for the installation of stair nosings, skirting boards, door thresholds etc. Solvent free. Coverage Approx 9 lin m/tube



Adhesive Syringe Assembly (Luer Lock)

20ml Graduated



Adhesive Syringe Tip (Luer Lock)

14G 25mm SE Tip



Lecol TS160 Slotted Acoustic Underlay 3mm

15m² roll, for use with the above MS262 adhesive.

See page 140 for full details.



Strong Grip Fast Action Panel Adhesive 350ml

Enhanced slump resistance for quick and simple direct bonding to most substrates without the use of temporary supports in most applications. Coverage Approx 10 lin m/tube



Adhesive Syringe Cap Seal

Black



General Paddle Whisk/Mixer

80 x 400mm





Lumberjack 5 Minute PU Adhesive Gel 310ml

Waterproof, thixotropic, transparent, gap filling gel, sets hard in just 5 minutes. Particularly suitable where rapid bonding is required. Coverage Approx 10 lin m/tube



Manual Adhesive Bulk Gun Applicator



Adesiv P6Trowel

P6 (for T&G Blocks/Strip)



Lecol PVAC 0.75kg

PVA joint adhesive for floating floors. Great general purpose wood adhesive.

Coverage Approx 25 lin m/ bottle when joint gluing



Mitre Fast Adhesive Kit

A two part instant adhesive system. Bonds most surfaces within 10 seconds.



Power Pro Gun 310/400ml



Lecol Wide Notched Trowel

P69 (for Parquet)



EXPERTS IN ACOUSTIC INSULATION, SOUND ABSORPTION AND REVERBERATION

CMSDanskin Acoustics soundproofing solutions have dramatically reduced airborne and impact noise in schools, theatres, churches, libraries, a host of residential projects and MORE!





Acoustic Saddles

97mm x 97mm
The saddles are available in three head cap heights S, M, L.
The small saddle permits
14mm of packing, the medium
- 29mm and the large - 40mm.



Regupol 4515 Eco Underlay

For concrete floors, material construction rubber/cork and suitable for underfloor heating.

3mm - 17dB

4.5mm - 18dB

Roll width 1.1m



Elevating Blocks

15mm Box of 432 30mm Box of 216


Can be placed in combination below saddles where floor variations are extreme up to a maximum height of 150mm.



Packers

Boxes of 500 per size Self locating plastic packers in 2, 3, and 5mm thicknesses. They interlock with each other and with the Saddle to achieve the levelling of uneven subfloors.



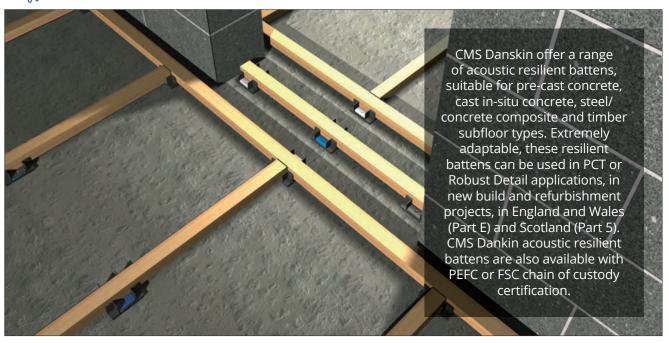

See pages 24 - 45 for Truly Bespoke Flooring and pg 132 for 18mm Chipboard











Adesiv Legastucco L100 Resin Filler 10kg

Quick-drying solvent-based binding resin for mixing with wood powder to grout and smooth parquet floors. Can be painted over. Coverage 2-4m²/1kg



Lecol - 7500 Filler

To be mixed with fine abrasion dust from the wood in order to obtain a paste that can be used to fill small voids in parquet or other wooden floors.

Coverage 2-4m²/1kg





Stopgap Clear Roll - Clear or Brown 40m

Solution for draughty floorboards, reduces draughts and provides a base for filler, fast and easy to fit. V-shape in design, this is the clever bit, as the v-shape means the strip is now springy. It will grip the sides of the gap it is pushed into, holding it in securely.






OSMO Wood Filler 250g Putty compound for use with engineered flooring. osmo Mahogany Maple/Birch Natural Clear Pine/Spruce Antique Oak












Bona Mix&Fill

Water based filler for mixing with fine sawdust. Ideal for filling joints, gaps and minor defects up to 2mm in width. Offers a good colour match with the surrounding wood. Quick drying and easy to sand.

Coverage 5-10m²/1ltr

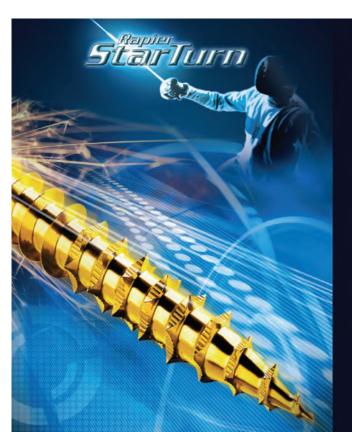

- No Pre-drilling
- Superior Holding Power
- 50% Quicker Screw Penetration
- 50% Less Drive-in Torque Required

The award winning Rapierstar StarTurn™ screw is probably the most efficient universal wood screw available. The patented StarForm™ cutting thread provides lower drive-in torque, quicker assembly times and exceptional holding power.

With a choice of Pozi or StarDrive™ recess, Full or Partial thread, Zinc or Yellow finish and sizes from 12mm to 300mm long, Rapier StarTurn™ screws provide a comprehensive and cost effective fastener for every application.

Rapierstar StarTurn™ screws offer up to 50% quicker drive-in time, with up to 50% lower torque - without pre-drilling.





Safe





Superior Plating

No Splitting & Low Torque

StarTurn Screws				
5 x 30mm Pack size 200	6 x 40mm Pack size 200			
5 x 40mm Pack size 200	6 x 50mm Pack size 200			
5 x 50mm Pack size 200	6 x 60mm Pack size 200			
5 x 70mm Pack size 200	6 x 70mm Pack size 200			
5 x 100mm Pack size 100	6 x 100mm Pack size 100			



What nails do I need?

Sub Floor Required Nail Length Product Thickness 9 - 12mm 12mm 32mm 9 - 12mm 16mm 32 or 38mm 14 - 15mm 15mm 38mm 14 - 15mm 19mm 38mm 19 - 20mm 19mm 44mm 19 - 20mm 22mm 50mm 25 - 26mm 22mm 50mm

Primatech T Nails 38/50mm Primatech L Nails 38/44/50mm

Primatech L Nails 32mm

How many nails do I need?

NOTE You can only nail your floor if you are installing over a wooden subfloor (not chipboard or concrete), as the nails need something to grip into. The nails will go into the tongued edge of the flooring plank at a 45 degree angle, so will be hidden from sight. This is why it is sometimes called 'secret nailing'.

total m² ÷ face width of flooring ÷ joist centres = NAILS NEEDED **EXAMPLE**

 $20m^2 \div 0.083$ (83mm width) $\div 0.30$ (300mm centres) = 804 NAILS



Sales Call 020 8501 6730 Delivering 6 days a week

Please **check the box size** when ordering fixings

Next Day - Before 10.30am £30.00 +VAT Before 12.00pm £25.00 +VAT Saturday - Before 10.00am £40.00 +VAT

NOTE: The above prices exclude deliveries for RECLAIMED FLOORBOARDS, BATTENS dependent on quantity, UNDERLAYS, PRO CARD, PLYWOOD, HARDBOARD AND SOME ADHESIVES. These products will be quoted per order due to either their size, weight or flammability properties.

NOTE Fixings that are priced per 1000 are sold in VARIOUS box quantities.

To confirm the current box quantity please speak to a member of our sales team.

Nails - Various



Staples 90 Type	Unit	Price
19mm Staples		
22mm "		
25mm "		
18mm Divergent Point Staples		
22mm"	.1000	
Use with 90 Type Stapler – See page 73		



Drill Bits			Unit	Price
160mm SDS Bit P	lus Ham	mer 6.5	Each	
160mm	. "	8.0	Each	
160mm	. "	10.0	Each	
210mm	. "	8.0	Each	
19mm Flat Wood	Bit		Each	
22mm	. "		Each	
25mm	. "		Each	



(1) 19mm Concrete Nails - 1kg Tub 25mm"	
(2) 40mm Lost Head Nails - 0.5kg Bag 50mm"	

Price

Unit

	16G Brads	Unit	Price
1	25mm 16 Gauge Brads/Finish Nails	1000	
	32mm"	1000	
	38mm"	1000	
	50mm"	1000	
I	64mm"	1000	
	Use with 16G Brad Nailer – See page 73		
1	25mm 16 Gauge Angle Brads/Finish Nails	1000	
	32mm"	1000	
	38mm"	1000	
	45mm"		
	50mm"	1000	
1	Use with 16G Angle Brad Nailer – See page 73		

Stainless Steel Headless Pins	Unit	Price
15mm Stainless Steel Headless Pins	1000	

	Super Hardened T Masonry Nails	Unit Price
.	25mm Super Hardened T Masonry Nails	1000
7	38mm"	
/	50mm"	
/	64mm"	
	Use with Multi Nailer – See page 73	

	Mini Head Hardened T Nails	Unit Price
7	18mm Mini Head Hardened T Nails	
	25mm"	
//	40mm"	1000
/	50mm"	1000
/	Use with Multi Nailer – See page 73	

• Can't see the species you are after? Please ask.

Hardwood N	Mouldings		Finish	Price/m
	16.5	MDF 16.5 x 16.5mm 2.4m lengths	Wrapped	White
	9	Scotia 16 x 16mm 2.9m lengths	Unfinished Lacquered Lacquered Lacquered	Oak
	9	*2.35m lengths 2.9m lengths	Unfinished Lacquered Lacquered Lacquered	Oak * Oak * Beech, Maple, Sapele Walnut
	00	Quadrant 19 x 19mm 2.9m lengths	Unfinished	Oak
	φ 25 φ 40	Flat Bead 25 x 6mm Flat Bead 44 x 6mm 2.9m lengths	,	Oak
	27 R 13.5 13.5 13.5 R 15 R 15	L Section 960mm/2.9m lengths	Lacquered Lacquered	14mm Oak 14mm Beech, Maple, Oak, Sapele 14mm Walnut 20mm Oak
	40 40 14 12 14 40 60 60 60 60 60 60 60 60 60 6	T Section 960mm/2.9m lengths	Lacquered Lacquered	14mm Oak
	40 23.5 47 47 25.5	Reducer Wood to Tiles 960mm/2.9m lengths	Lacquered Lacquered	14mm Oak 14mm Beech, Maple, Oak, Sapele 14mm Walnut 20mm Oak

All prices are per linear m unless stated

Hardwood Mouldings		Finish	Price/m
48 38 57 8 43	Ramp 960mm/2.9m lengths	Lacquered Lacquered	14mm Oak 14mm Beech, Maple, Oak, Sapele 14mm Walnut 20mm Oak
70	Bullnose Stair Nosing For 10mm Flooring	Unfinished	Oak
41	For 14/15mm Flooring	Unfinished Lacquered Lacquered	Oak Beech, Maple, Oak, Sapele Walnut
50 20	For 20mm Flooring All staircase nosings 960mm/2.9m lengths	Lacquered Unfinished Unfinished	
70	Square Edge Stair Nosing For 14/15mm Flooring - rebated	Unfinished	Oak
	For 20mm Flooring	Unfinished	Oak
50 20	All staircase nosings 960mm/2.9m lengths	NOTE reba	ted for our Stability 15/20mm flooring.
Hardwood Accessories		Finish	Price/unit
Wooden Door Stop Fl	oor or Wall Fixed	Lacquered	Beech, Cherry, Oak, Walnut
12mm Snapable Woo	den Pellets - Pack of 100	Unfinished	Oak
16mm Dowled Radiat Deep - 15mm in dept	•		OakIroko, Merbau, Oak, Walnut
15mm Snapable Radi Slim Line - 4mm in de		Unfinished	Mahogany, Oak

Approx Coverage 10-12m²/ltr unless specified





Bona White Primer 5ltr

Waterborne 1 component tinted primer used to create a 'white washed' look to a wood floor - ideal when creating a Scandinavian style interior! Combine with a Natural, Extra Matt or Matt Bona lacquer.



Bona Natural Primer 5ltr

Waterborne 1 component tinted primer. Overcoat with Mega Natural or Traffic Natural for the most natural, 'unfinished' look and a highly durable surface.



Bona Classic Primer 1ltr

Waterborne 1 component primer, for a classic, light wood look. Produces a well-bodied surface thanks to its high solids content. Non-yellowing.



Bona Classic Primer 5ltr

Waterborne 1 component primer, for a classic, light wood look. Produces a well-bodied surface thanks to its high solids content. Non-yellowing.



Bona Intense Primer 5ltr

Waterborne 1 component primer with a medium rich wood colouration. Suitable on practically all types of wood, especially on medium to dark species. Highly suitable for floors with underfloor heating.



Bona Amber Primer 5ltr

Waterborne 1 component rich, amber wood tinted primer. Highly suitable for floors with underfloor heating and/or moving floors such as end grain or plank floors.



Bona Nordic Tone 5ltr

Pre-treatment to using Bona Craft Oil (see page 127) for an intensively white floor. It inhibits wood yellowing and can be used on both softwood and hardwood.



Bona Rich Tone 5ltr

Pre-treatment to oak floors for creating a rich dark brown giving the impression of smoked oak.

Use with Bona Craft Oil see page 127.



Bona

Bona Mega

Gloss/Silk Matt/Matt/Extra Matt 1ltr is in stock in Silkmatt only

Waterborne 1-component oilmodified topcoat, no mixing. Produces a subtle rich tone more noticeable on light wood.



Bona Mega ONE 5ltr

Silk Matt/Matt/Extra Matt
Waterborne 1 component
polyurethane topcoat. Can be
used with or without primer.
Clear, non-yellowing formula.
Brings out a nice, warm wood
colouration.



Bona Mega Natural 5ltr

Waterborne 1 component polyurethane lacquer. Seals and protects recreating the look and feel of untreated wood. Produces a subtle rich tone more noticeable on light species or floors treated with light stains.



Bona Traffic HD & Hardener 4.95ltr

Silk Matt/Matt/Extra Matt 2 component, tough, fast drying, clear, non-yellowing lacquer for wooden floors exposed to extreme wear, allows full traffic after 12 hrs.



Bona Traffic Natural 4.95ltr

Unlike conventional lacquers the surface, to the touch, feels more like raw finely sanded wood, use to achieve the most natural looking surface. For best results combine with Bona Natural primer.



Bona Traffic HD Anti Slip & Hardener 4.95ltr

Matt

All the features of Bona Traffic HD but formulated for slip resistance in workplaces or kitchens where there is an increased risk of spills. ACCESSORIES



Bona Retarder 200ml

Designed to be used when the indoor humidity is low and/or the temperature of the room is higher than normal. This will reduce the risk of the lacquer drying too quickly and leaving roller marks in the dried coat.



Bona Traffic Replacement Hardener 400ml

Replacement hardener is the second component must be used in conjunction with Bona Traffic HD.







Junckers Baseprime 5ltr

BasePrime is a quick-drying oil based primer. Excellent for wooden floors where waterbased primers cannot be used due to poor adhesion, for example exotic and oily timbers. Gives the floor more depth of colour and should only be used directly on to bare wood.



Junckers High Performance Sport Lacquer 4.95ltr

Silk Matt

2 component waterbased 100% polyurethane lacguer for very high traffic sports floors. Suitable for previously sealed as well as on new or fully sanded floors. Non-yellowing, extremely durable, scuff resistant, and very fast curing.



Junckers PreLak Primer 5ltr

Fast drying, water-based primer for use on untreated or machine sanded wooden floors and to be used with other water-based floor finishes on internal timber floors. Can be used with Strong and HP Commercial.



Junckers High Performance Commercial Lacquer 4.95ltr

Ultra Matt/Matt/Silk Matt/Gloss

2 component, water-based polyurethane lacquer. For pre-finished or untreated, newly installed or machine sanded wooden floors in domestic and commercial areas with high levels of traffic and extreme wear.



Junckers PreLak 5ltr

White/Grey/Nordic Fast drying waterborne primer for use with other water-based floor finishes on internal timber floors. Can be over-coated with any of the Junckers waterbased floor lacquers.



Junckers High Performance Friction+ 4.95ltr

Ultra Matt

Low-odour, hard-wearing water-based lacquer for wooden floor areas where a high level of slip resistance is required. Use as the final coat on floors treated with Junckers HP Commercial floor lacquer.







Junckers Strong Premium 5ltr

Matt/Silk Matt/Ultra Matt

1 component water-based, low odour lacguer for wooden floors in high traffic areas. Suitable for previously sealed as well as on new or fully sanded floors.



Junckers ProFinish 5ltr

Ultra Matt/Silk Matt

1 component water-based acrylic/polyurethane lacquer. For use on internal pre-sealed, new, or sanded old wooden floors. A quick drying and curing lacquer, suitable for light residential/ domestic levels of traffic.



Junckers Professional 625 Lacquer 5ltr

Matt/Silk Matt/Gloss

2-component, quick-drying, acid curing lacquer for use on wooden floors in high traffic areas. Used on both previously sealed as well as on untreated or sanded floors.



Junckers **Professional** 625 Replacement Hardener 200ml

Call for discounts for volume orders over 12 bottles





Lobadur® WS Life 5ltr

Semi-Gloss

Waterborne 1 component finish for wooden floors. Elastic, stable properties for normal traffic, use after primer.



Lobadur® WS Viva 5ltr

Matt-Satin/Semi-Gloss

Waterborne 1 component finish. For normal to heavy traffic residential areas and light commercial use. Excellent for renovation, use after primer.



Lobadur® PrimaSealPlus 5ltr

Alcohol-based primer for wooden floors for all wood species. Intensifies the colour of the wood.



Lobadur® WS 2K Fusion 5ltr

Matt-Satin/Semi-Gloss

Waterborne 2 component polyurethane finish for wooden floors with extremely good final hardness. PLEASE NOTE FOR THE UK: Matt-Satin = Matt Semi-Gloss = Silk Matt



Lobadur® WS EasyPrime 5ltr

Polyurethane-acrylate waterborne primer for roller and trowel application, offers rapid drying. Suitable for virtually all types of European and exotic timber, sports and multipurpose halls.



Lobadur® WS 2K Fusion 5ltr Anti-Slip R9

Waterborne 2 component polyurethane finish for floors. Elastic, excellent chemical and abrasion resistance for heavy traffic, use after primer.





Lobadur® Whitener 80ml

An additive that is added to water-based Lobadur® primers and finishes for a smooth brightening of wood floors. Suitable for all light wood species, preferably recommended for matt finishes.



Loba Measuring Jug

For mixing 2 part lacquer.

Loba Lacquer Bucket

Bucket with lid and measuring scale.



250mm Microfibre Roller Sleeve 13mm Pile

Use with 2K Invisible Protect AT. See page 146 for CareCleaner.



Sadolin PV67

Satin/Gloss

2 Part spirit based wooden bar top lacquer. Other areas of use include dance floors, restaurants, community halls, sports hall floors, shops and office flooring.

Coverage 10-12m²/ltr





Lobadur® 2K Invisible Protect AT 4.55kg

Waterborne surface protection for heavy traffic. Retains the natural appearance and feel of untreated wood. Use with 12mm Pile Roller (120g/m²).

Coverage 8m²/ltr



Shellac Base Polish 5ltr

Transparent spirit based sealer, use for a darker finish with most lacquers and

Coverage 10-12m²/ltr



Rollers and Handles see page 137



Shellac Base Polish White 5ltr

White spirit based sealer, virtually colourless once applied, use for a lighter finish with most lacquers and waxes.

Coverage 10-12m²/ltr



122 **Call 020 8501 6730** info@wfa.uk.net www.wfa.uk.net Call us now for expert advice. 123









Adesiv K32S Primer 10kg

Water-dispersion adhesion promoter. Suitable for absorbent surfaces or for non absorbent floors, to be applied before cement-based Adesiv Adecem Fiber.

Coverage approx 60-70m²



Adesiv Adecem Fiber 25kg

Self-leveling fiber-reinforced cement-based powder for smoothing uneven substrates of thicknesses from 3 to 50mm. Suitable for underfloor heating. Coverage depends on the flatness of the surface.





Adesiv WB PU 10kg

Single component PU DPM. 1 coat primer or 2 coats as DPM. Drying time 60 minutes. Apply kiln dried sand to final coat.

Coverage 2.5-5m²/kg



Ardex A 45 Repair Mortar Mix 11kg

Rapid drying and hardening, slump free mortar, hard enough to walk on and receive floors after 90 mins regardless of thickness.

Coverage approx 7m² at 1mm



Kiln Dried Sand 20kg

This sand is dried in a kiln which removes all the moisture, perfect to be used in conjunction with PU DPM's.



Screeding Trowel Soft Grip Handle

14in x 4in



Large Flexi Tub 42ltr

Extremely versatile and virtually indestructible. It can be used for mixing plaster or cement, moving rubble and various other jobs.



8 WORK!

Primed surfaces can be

walked on after approx.

dependent on surface

structure and absorbability

60 minutes.

of subfloor.

*Consumption is

oroduct cal

for further details

Wakol MS330 Silane Primer and 10" Application Roller

Ready-to-use 1-component MS primer for priming absorbent and non-absorbent subfloors, and solidifying abraded or sanded screed edges.

Application and consumption*;

Approx. 80 - 120g/m² - To harden surfaces when used as a primer use WAKOL Primer roller, short haired velour roller or rubber lip.

Approx. 250 g/m² - When used as a moisture barrier use WAKOL MS Special Roller - shown left and on page 135 - or trowel notch size according to TKB A2.



Wakol Z715 Levelling Compound 25kg

Level uneven sub floor with layer thickness of 1-10 mm unextended. Extended from 5-25 mm under parquet as of 2 mm layer thickness.

Coverage Approx 6m² at 3mm



Wakol AR114 Reinforcement Fibre 250g

Alkali-resistant glass fibres for reinforcing WAKOL Z715. Reduce cracking on unstable old subfloors, wood planks, wooden material tiles and prefab screeds.



Wakol PU280 Primer/DPM

Single component PU Resin Primer or a DPM when applied crosswise in two layers. Drying time 45 minutes.

Coverage 6-10m²/kg



Wakol D3055 Primer 10kg

Ready-to-use dispersionbased primer for all types of sub floors under all Wakol adhesives.

Coverage 8m²/kg



Wakol D3045 Primer 12kg

Ready-to-use single component 'aggregated' primer. Adhesion promoter for Z715 on PU280.

Coverage 8m²/kg



Wakol D3035 Primer 10kg

Ready-to-use primer for use on absorbent surfaces under the levelling compound.

Coverage 6m²/kg

Other types of matting available including logo matting please call



Approximately 80% of dirt in a building is introduced by footwear transported from outdoors. To help both protect and keep clean the solution is to lay protective matting.

See page 116 for L Section Molding.

Surcharges apply on all 'TO ORDER' matting • Next Day £25.00 • 5 Working Days £15.00

		Matting	5					١	Width	Price/m²
		"							.1m	
Natural	Yellow	Havana	Red	Charco	al G	rey	Green	Blue DK	Brown	Black
		9mm Cc "	oloured Inger	nius Heavy D	Outy Matti	ng - TO OR	RDER		.1m .2m	
	Black	Grey	Slate	Blue	Yellow	Red	Green	Tan	Brown	





- Great stain, water & wear resistance
- Spot repairable
- Intermixable colours
- Fast curing, floors ready for light use in 8 hours
- Compatible with tropical wood species
- Very low VOC content
- Compatible with other oils and colours from the Bona Oil System
- Application by squeegee, roller, trowel or buffing machine
- Overcoatable with Bona Traffic HD, Bona Traffic HD Anti-Slip and Bona Traffic Natural



Bona Craft Oil 2K 1.25ltr

Bona Craft Oil 2K's unique formula, made from modified plant based oil, delivers an accelerated drying time and great wear resistance. It's the perfect treatment for a wide variety of wood species including tricky ones such as cherry and walnut.

Bona Craft Oil 2K produces a beautiful, strong water and stain-resistant surface that is ready for light use in just 8 hours. For enhanced durability, the oiled floor can be overcoated with any version of Bona Traffic lacquer if required, see page 119, after just 12 hours. 12 colours are available as standard and each are intermixable.



Ash Clay Frost Graphite



Neutral Light
Neutral Pure
Sand
Umbra

Bona Hard Wax Oil Mare Section floors Bons

Bona Hard Wax Oil

Silkmatt/Matt

Very low in odour and easy to handle, and can be applied with roller, brush and trowel. Leaves an open, breathable surface that reduces the risk of side-bonding. Highly suitable for floors with underfloor heating. Free from cobalt and ketoximes. High coverage rate.



Bona Craft Oil

A natural vegetable oil, it has virtually no odour and significantly lowered VOC. Rapid drying and easy to apply. ACCESSORIES



126**Call 020 8501 6730** info@wfa.uk.net www.wfa.uk.net

Osmo Polyx High Solid Hardwax Oil

Matt/Satin/Gloss



3062 Matt 3032 Satin

3011 Gloss





Osmo Polyx High Solid Hardwax Tints Oil

All the renowned properties of the original Polyx®-Oil, tinted for individual creativity. Polyx®-Oil Tints are waterrepellent, dirt-resistant and durable. Microporous, breathable finish which does not crack, peel or flake. No sanding necessary for spot repairs or future applications. Protects and colours with wood grain visible.

Coverage 30m²/ltr/coat



3040 White 3067 Light Grey 3071 Honey 3072 Amber 3073 Terra 3074 Graphite 3075 Black





Osmo Polyx High Solid Hardwax Oil Effect Raw 2.5ltr

Raw/Silver/Gold

Coverage 30m²/ltr/coat

33.50

3044 Raw 3091 Silver 3092 Gold





osmo/

Wood Wax

Finish

GI-West


Osmo Wood Wax Finish

Combining all the advantages of oils and waxes in one unique product. It is possible to create an almost infinite variation of naturally occurring colour shades to enhance the grain showing a gorgeous, natural colour tone or if you prefer a choice of intensive, bright or vivid colours. Wood grain remains visible with transparent tones and can be hidden with intensive tones. Very durable and hardwearing. Water and dirt resistant. No sanding necessary for spot repairs or future applications. Microporous, breathable finish which does not crack, peel or flake. For high tread surfaces when using the intensive colours only one coat is recommended, followed by a clear coat of Polyx®-Oil - **NOTE** characteristics become hidden as shown below if applying a second coat of Wood Wax Finish.

Transparent Tones










Oil Stain Hardener 6631 is an optional second component, this can be used to harden the finish which reduces the drying and curing time from 12 to just 4 hours! *To Order*.



Osmo Oil Stain & Hardener

Colour and protect wooden floors without visible transitions, applying a single coat of the Oil Stain will create a transparent look showing the wood's natural grain, whilst an optional second coat can give a more intensive colour tone. A clear final coat of an Osmo Polyx®-Oil product is a must to protect pigmented finishes from wearing of colour.







Osmo Wood Wax Finish Clear Extra Thin

Natural oil and wax combined interior finish designed for hard, ingredient-rich, oily and dark wood species - such as Teak, Cedar, Iroko, Walnut etc.

1101 Satin

OSMO

A torn use fast

Hartwachs-Öl

OSMO

Who has Dame

Mandado OS

S125 Farblos

Saddermatt

Osmo Polyx Oil 2K Pure 1ltr

Solvent and water-free 2-component oil developed for mechanical applications.

Coverage 40-50m²/ltr/coat

6125 Clear Satin

128 Call 020 8501 6730 info@wfa.uk.net www.wfa.uk.net

Mylands Non Fade

Ground Stain

MYLANDS

Waterborne pigment stain for wooden floors. Colour intensification under colour oils. By accentuating the wood structure and grain, vibrant

Loba® PreTone Stain

Use on raw, carefully sanded wood. More intensive colour effects are achieved through the combination of water

and pigment, especially with light colour effects. When in combination with HS 2K ImpactOil Color the individual colour designs you are able to create becomes almost unlimited.











Loba® HS 2K ImpactOil Color

2 component coloured HighSolid oil based on natural ingredients for staining of parquet and hardwood floors. Suitable for initial impregnating treatment of hardwood floors. Also suitable for rooms that are exposed to increased levels of moisture.

such as bathrooms, spa areas, etc. Anti-slip as per BGR 181 and DIN 51130 evaluation group R9. Due to its good penetration properties the wood will be preserved, but remains porous and breathable. Compared to regular 1C oils the 2C technology achieves a quicker curing, a lower susceptibility to dirt and a better water and chemical resistance.

Coverage 400 - 500 ft² per 2.5 kg unit for transparent oil where 1 coat is required. 150 - 250 ft² per per 0.75 kg unit for coloured oil with 2 coats, amounts depend on the absorbing properties of the wood.





Loba® Markant Color or **Transparent**

Natural hardwaxoil for staining of parquet and hardwood floors. High-quality, layer-building oils accentuate the natural look of the wood and at the same time achieve excellent resistance to dirt and water. Suitable for virtually all types of European and exotic timber.

product cal

for further

- Water and dirt resistant
- Film-forming, wear-resistant
- · Accentuates the natural beauty of the wood • Earliest possible overcoating after 12 hours
- Usable after 24 hours
- · All variants can be mixed with each other
- Colours available in 0.75ltr only
- Transparent available in 0.75ltr and 2.5ltr Satin or Matt

Coverage 20-100ml/m² depending on tool used







Rustic Oil Colour Nut

Walnut

White

Junkers Rustic Oil Colour

Indoor priming and finishing oil product for untreated wooden floors. For areas with high levels of traffic and extreme wear then this can also be overcoated with HP Commercial, see page 120. These oils emphasize the natural grain structure of the wood.

Coverage** 5-50 m²

Rustic Oil

**High and low traffic areas; 1 impregnating coat of Rustic Oil (5m² per litre), 2 thin coats of Rustic Oil (50m² per litre).

Junkers Rustic Oil Clear

Satin finish, priming and finishing oil for wooden floors that can be used in combination with Rustic Oil Colour. Or, if you like the appearance of oil, but want the advantages of a lacquered surface, then you can combine lunckers Rustic Oils with Junckers HP Commercial lacquer.

Coverage** 5-50 m²

Rustins Wood Dye Stain

Loba® ProColor Stain

For staining of parquet and

hardwood floors. Dries reliably

and lap-free, easily varnished

over with LOBA® waterborne

finishes. To lighten the shade

or to reduce the coverage, mix

Max. 3 parts transparent to one

Smoked Oak

Transparent

Sucupira

Wenge

White

part colour. NOTE - All variants

can be mixed with each other.

The below samples have been finished with 2 coats of Viva Silk.

Coverage 20-33/m² depending on tool used

Bilinga

Black

latoba

Kambala

Papyrus

Mahogany

with the transparent variant.

This solvent based, fast drying stain for new bare/stripped wood does not raise the grain & must be over coated/sealed. All shades can be intermixed. The below samples have been

finished with a Satin Lacquer. Coverage 24m2/ltr/coat depending on wood absorbency



* Water-based

MYLANDS 8 X

Solvent based stain available in a comprehensive selection of wood shades for professional use only.

ACCESSORIES

The below samples have been



finished with a Satin Lacquer. Coverage Approx 20m2/ltr/coat Medium Oak Warm Medium Oak Dark Oak Rosewood Sapele Teak Walnut Dark Walnut

ACCESSORIES

Sheet cutting charge 4-9mm £1.00 & 12-18mm £1.50 per cut



Plywood/Hardboard/Chipboard Price Unit

Hardboard

..2.4m x 1.2m (8' x 4')..... ..Sheet 3mm.....



WBP Plywood (only use with timber flooring)

		Sheet
5.5mm		
9mm		ıı
12mm		JI
15mm	ıı .	и
18mm	II .	ıı .
		II

WBP Spruce Plywood (T&G)

18mm2.	.4m x 0.6m (8' x 2	")	Sheet
--------	--------------------	----	-------



MR Chipboard (T&G)

..2.4m x 0.6m (8' x 2').....



Sheet Count **CALCULATION**

customer area ÷ product area = SHEETS NEEDED

EXAMPLES

 $85m^2 \div 2.88$ (Hardoard) = 30 SHEETS 165m² ÷ 1.44 (Chipboard) = 115 SHEETS

PRODUCT AREA CALCULATION = WIDTH x LENGTH





Pro Carpet 600mm x 100m.

Clear polyethene with low tack acrylic adhesive.



Pro Card in 2 weights

300 Micron 100m² 550 Micron 50m² - heavy duty for use under the Pro Board (Corex).



Pro Dust Sheeting

4 x 25m 45 Micron 260G 100m²



Pro Board (Corex) FR Euro

2.4 x 1.2m Use to protect flooring.



High Tack Silver Cloth Tape Roll

50mm x 50m.



Masking Tape Rolls

50m rolls in either 25mm or 50mm.



Frogtape Delicate Masking Tape

41.1m rolls in either 24mm or 36mm.



Frogtape Multi-Surface Masking Tape

41.1m rolls in either 24mm or 36mm.



Loba Measuring Jug For mixing 2 part lacquer.



Loba Lacquer Bucket Bucket with lid and measuring scale.



Volcano Safety Goggles







Jenkins Thinners 5ltr



White Spirit 2ltr



Stain Kettle 2.5ltr



Ear Defenders





Festool Digital Radio 230V or Battery Lightweight analogue or DAB digital radio.



Paint/Lacquer **Bucket and Liners**

Note: 10 Pack Liners are available for the 15ltr bucket only.



Black PVC Bucket 13ltr



Large Flexi Tub 42ltr



Flat FFP2 Dust Mask with valve



1 Pair ABEK1P3 Filters Combination gas and particulate filter cartridges for JSP Force 8 half mask.



JSP Force 8 Half Mask Complete with press to check P3



Heavy Duty Rubbish Bags 500G 40 x 21"



Replacement Bags Machine/Edger For all types of Machines.





Tack Cloth Pack of 50



Sand Pad/Sponge



Large Nitrile Gloves Box of 100 powder free large or x-large



Uniwipe Ultragrime Industrial Wipes 100 huge wipes -

super soft, strong and absorbant with a unique greasebusting ability.



Cork Expansion Strip

22 x 12mm

x 30 14 x 10mm x 64 10 x 10mm x 80 12 x 8mm x 80

Strips/box quantity is noted after the cost, prices are per strip.









Blue sleeve (water based) For use with either Padco floor coater.









Mutton Cloth


400G





Rip-resistant cotton cloths for oiling, cleaning and buffing













10" Osmo Roller Sleeve Suitable for the application of all oil-based wood finishes.





Professional Paint Brushes -Kana 50mm or 75mm Osmo 100mm Suitable for the application of all oil-based wood



10" Green Acrylic **Applicator Pad** 18mm Pile Great loading capacity for excellent coverage, suitable for rough surfaces.







Osmo Brush 220mm Made with 100% natural bristles and soft tips which gives fine control in achieving the desired effect. Attach to the Osmo Telescopic Pole.



	Trims	Unit	Price
	25mm 9mm		
-	Matwell Edging Gold 2.70 lin m Lengths	Each	
	Matwell Edging Silver 2.70 lin m Lengths	Each	
	Naplock Single Gold 2.70 lin m Lengths	Each	
1,1-1,1	Naplock Single Silver 2.70 lin m Lengths	Each	
	Coverplate Gold 2.40 lin m Lengths	Each	
•	Coverplate Silver 2.40 lin m Lengths	Each	-
	Formable Angle Trim - Mill Aluminium 10mm (9mm Internal) 2.50m Length	Each	
	16mm (15mm Internal)"		
3mm	19mm (18mm Internal) "		


		Product Code	Descriptio	n	Price	
ECOFILM	PRO	EPR0-10	5m² ECOFILMPF 10m² ECOFILMP 15m² ECOFILMP 20m² ECOFILMP	RO KIT		
arr		CTBL10 CTBR10 MASTIC1	10 x Connection1.5mm² x 10m Cold Tail1.5mm² x 10m Cold Tail101mm x 1m Mastic Ai20 Green Bus Bar Inst	l Leads (Blue) Leads (Brown)dhesive Tape		
		Product Code	Descriptio	n	Price	
ECOFILM	EL06 ECOMAX-LITE Thermal Insulation (800mm x 1250mm) ADT50 Heavy Duty Adhesive Tape (50mm x 50m roll) PVB12 Polyester Vapour Barrier (1m x 12m)* PVB25 Polyester Vapour Barrier (1m x 25m)* TH132AF Digital Programmable Thermostat *1m x 12m of PVB has a floor coverage of 10m² **1m x 25m of PVB has a floor coverage of 20m²					
		TH132AF*	Digital Programmable *1m x 12m of PVB has a floo	Thermostatr coverage of 10m ²		
Length in m	300mm wide element Element Ref Output w	TH132AF* * t 500r	Digital Programmable *1m x 12m of PVB has a floo	Thermostatr coverage of 10m ²	ment	

Length in m	300mm wide element Element Ref Output w Price	500mm wide element Element Ref Output w Price	1000mm wide elemen Element Ref Output w
2.00	ES13-32070	ES13-520122	ES13-1020252
2.50	ES13-32588	ES13-525153	ES13-1025315
3.00	ES13-330105	ES13-530183	ES13-1030378
3.50	ES13-335123	ES13-535214	ES13-1035441
4.00	ES13-340140	ES13-540244	ES13-1040504
4.50	ES13-345158	ES13-545275	ES13-1045567
5.00	ES13-350176	ES13-550306	ES13-1050631
5.50	ES13-355193	ES13-555336	ES13-1055694
6.00	ES13-360211	ES13-560367	ES13-1060757
6.50	ES13-365228	ES13-565397	ES13-1065820
7.00	ES13-370246	ES13-570428	ES13-1070883
7.50	ES13-375263	ES13-575458	ES13-1075946
8.00	ES13-380281	ES13-580489	ES13-10801009
8.50	ES13-385298	ES13-585519	ES13-10851072
9.00	ES13-390316	ES13-590550	ES13-10901135
9.50	ES13-395333	ES13-595580	ES13-10951198
10.0	ES13-3100351	ES13-5100611	ES13-101001261



Oak wood type, maximum 16cm in width.

Recommended adhesive PU225 see page 105.



Cork/polyurethane foam matting for improving footfall sound and heat insulation.

Suitable as a soundproofing plate underneath: strip parquet, multi-layer parquet, solid wood planks.

35m x 1m x 3mm



Lecol TS160 Slotted Acoustic Underlay 3mm 15m² Roll

Slatted Underlay which has been coated on one side with aluminium. This prevents moisture from the subfloor permeating the underlay and entering the underside of the wood. The slats ensure the correct application of the MS262 adhesive see page 106.



3mm Heatflow 15m² Roll

1.37m x 11m

Sound Reduction up to 21db, use when installing engineered wood and laminate flooring over underfloor heating.
Material is sponge rubber, lay white side up.

See page 139 for underfloor neating.



Bitumen Flooring Paper 25m² Roll


Use over joists with T&G Flooring BS1521.
Breathable membrane, building paper each side of the bitumen.
Use where the timber subfloor has a moisture content higher than the recommended 10-12% for installation e.g. if you are nailing over battens or timber joists.



Blu "All In One" Underlay 10m² Roll

Sound Reduction 20db - 3mm (10m²)

Integral damp proof membrane with joining tape. For wood, concrete and laminate floors. Excellent thermal and shock insulation qualities.



1000G DPM 100m² Roll

4m x 25m

Designed to be used in conjunction with a cushioning underlay, and to prevent moisture damaging the floor.



Fibre Boards 5.5mm 10.03m² Pack 7mm 9.6m² Pack

Fine Floor eliminates noise in rooms, limits heat loss through the floor and gives the impression of a "warm" floor. These natural wood fibre underlay insulating panels are used for laminate, engineered, and solid wood; domestic installations.



Regupol 4515 Eco Underlay 20m² Roll 3mm - 17dB 12m² Roll 4.5mm - 18dB

For concrete floors, material construction rubber/cork and can be bonded to all types of floors.

Suitable for underfloor heating. Roll width 1.1m

See page 108 for acoustic solutions.



Technics Underlay 15m² Roll

Sound Reduction:-5mm up to 28db 6mm up to 31db*

High quality reinforced crepe backing provides exceptional dimensional stability to the installation of wood floors.

*Available to order



2mm Quick Therm Underlay 10m² Roll

Ultra low 0.35 Tog, perforated, very dense, closed cell polyethylene foam underlay - specially designed to offer maximum heat transfer for use with underfloor heating systems; for engineered and solid wood.



3mm Pro-tech Foam 10m² Roll

Sound Reduction up to 22db, (Inc 1000G DPM) takes out unevenness in the sub floor surface, full 1000 gauge damp proof membrane to both sides with integral joining tape.



4mm Duralay Timbermate Excel DIY Underlay 10m² Roll

Sound reduction underlay 23dB. Suitable for underfloor heating.

Timbermate Vapour Tape

75mm x 25m

Self adhesive seaming tape that creates a moisture barrier with improved joint seal protection and also strengthens underlay joints.







Bona Starter Kit

Contains wood floor mop, microfibre cleaning pad and wood floor cleaner spray 1ltr. Coverage up to 50m²/ltr



Telescopic Microfibre Cleaning Mop Set

Includes the handle, swivel head and cleaning pad.

Replacement Microfibre Pad



Bona Telescopic Mop

Includes microfibre pad, this easy to manoeuvre, swivel mophead with telescopic handle works with all Bona Pads.



Bona Refresher 1ltr

Ready-to-use, waterborne maintenance coating for varnished floors. It revives scratched and dull surfaces Important! Do not use on waxed or oiled floors.

Coverage up to 50m²/ltr



Bona Spray Cleaner and Refill

Ready-to-use and specially developed for cleaning of varnished or hard-waxed wooden floors. Spray-on cleaner, pH neutral, leaves no dulling residue.

Coverage up to 50m²/ltr



142 Call 020 8501 6730 info@wfa.uk.net www.wfa.uk.net

Bona Microfibre Pad Refresher

Designed for the application of Bona Wood Refresher and all Bona polishes on all surfaces. Washable and reusable and attaches to the Bona Mop with Velcro-like strips.




Bona Microfibre Pad Cleaner

For use with Cleaner, this pad is a washable microfiber pad which attaches with Velcrolike strips to all Bona Mops, including the Bona Spray Mop.



Bona

Cleaner



An everyday concentrated floor cleaner for all types of interior wooden floors. Used for regular mopping or in a machine based cleaning programme.

Coverage up to 2000m²/ltr



Bona Care Oil

Designed for the maintenance of oiled floors. Extremely low VOC and odour. It delivers superior protection due to its excellent penetration and is very quick drying.



Bona Freshen Up 5ltr

Ready-to-use, waterborne maintenance coating for most finished and pre-finished floors. Revives a scratched and dull surface giving a newly finished look.

Coverage up to 50m²/ltr



Bona Polish Remover 1ltr

Removes build up from polish & other maintenance products. Important! Do not allow into open gaps in the floor. May cause permanent stain.

Coverage up to 50m²/ltr



Bona Polish Gloss

Ready-to-use, waterborne maintenance coating for varnished floors. Gives the surface new lustre and continued protection.

Coverage up to 50m²/ltr



Bona Polish Matt

Ready-to-use, waterborne maintenance coating for varnished floors. Protects matt floors without drastically increasing the gloss level.

Coverage up to 50m²/ltr



Clear Plastic 1ltr Bottle with Spray Trigger



Bona Dusting Pad

For use with the Bona Standard or Spray Mop for dry mopping. Machine washable.

Call us now for expert advice. 143







Junckers SylvaCleaner

SylvaCleaner is a universal cleaning product for daily or periodic cleaning of lacquered and oiled wood floors. SylvaCleaner has been developed to dissolve surface dirt and to dry quickly. Use a scrubber-dryer machine or clean by hand.

Dilute 50-200 ml per 10 litres of water



Junckers SylvaNeutralizer 1ltr

Use to neutralize SylvaCleaner before re-lacquering or to maintain slip resistance.

The product also removes grease from wooden sports floors. It is not necessary to clean the floor with water afterwards.

Dilute 200ml to 10ltr of water



Osmo Wash and Care

Concentrate for the everyday cleaning and maintenance of oiled and waxed wooden flooring.

1 cover cap per litre of water



Osmo Maintenance Kit

Contains Osmo Wash and Care for regular cleaning, Liquid Wax Cleaner for occasional intensive cleaning and refreshing. Maintenance cloths and instructions are also included.



Osmo Intensive Cleaner

The ideal alternative to sanding wood surfaces finished with oils and waxes, use for intensive cleaning and restoration.

Coverage up to 30-100m²/ltr



Clear Plastic 1ltr Bottle with Spray Trigger



Wood needs care and protection.

The best product for wood is a finish that is developed only for wood, so you can enjoy your wood for a long time. With just one tin of Osmo you can achieve near to double the square meter coverage of an ordinary finishing system, saving you time and money.

The foundation of Osmo wood finishes has been based upon purified and refined natural resources which are carefully harvested natural oils and hard waxes.



Osmo Maintenance Oil 1ltr

3079 Matt 3081 Satin 3440 White Transparent

Ideal for the maintenance of solid wood, plank, parquet and strip treated with Polyx®-Oil. Coverage up to 40-60m²/ltr



Osmo Maintenance Oil Anti Slip (R9) 1ltr

3098 Semi-Matt

Ideal for the maintenance of solid wood, plank, parquet and strip treated with Polyx®-Oil. Coverage up to 40-60m²/ltr



Osmo Liquid Wax Cleaner 0.4ltr

Clear Spray

Ideal for removing tough stains and best suited for refreshing all surfaces treated with Osmo Polyx®-Oil.

Coverage up to 80-100m²/ltr



Osmo Brush Cleaner 1ltr

Perfect for use on paint brushes after use with wood finishes to remove the finish from the bristles. Can also be used a thinning agent for solvent-based finishes, such as Osmo's range of wood oils.



Osmo Liquid Wax Cleaner 1ltr

3087 White

Same spec as Clear 3029 other than **ONLY** to be used on white coloured/treated surfaces.

Coverage up to 80-100m²/ltr



Osmo Liquid Wax Cleaner 1ltr

3029 Clear

Ideal for removing tough stains and best suited for refreshing all surfaces treated with Osmo Polyx®-Oil.

Coverage up to 80-100m²/ltr





Lobacare® Spray Mop, Pad and Cleaner

Integrated Spray System for the cleaning of parquet and hardwood floors.

- No Bucket Required



Lobacare® Cleaner 1ltr

Daily cleaning for lacquered and oiled floors.

Use on all parquet, cork and multi-layer parquet flooring. Highly concentrated and specially developed for the LOBACARE® line of maintenance products but compatible with all floor-care systems.



Lobacare® Spray Mop Microfibre Replacement Cover

Microfibre mop cover replacement for use with the Loba Spray Mop. Used for cleaning wood and cork floors.



Lobacare® V6 Finish 1ltr

Matt/Gloss

Permanent polyurethane floor care for lacquered floors.

Matt - Suitable care product for extra-matt and matt-finished hardwood floors, cork floor coverings and more. Gloss - Suitable care product for semi-matt and glossy-finished parquet, hardwood floors, cork floor coverings and more.



Lobacare® ParkettCare 1ltr

Waterborne floor care maintenance product for lacquered floors.

Suitable care product for matt and extra-matt-finished parquet and hardwood floors. Also ideal for UV-finished surfaces.



Felt Gard Plus 8 pack

25mm Nail In Felt Pads Once hammered into the base of the furniture the felt covered pad is fixed in place and will then protect the flooring.



Kingston Felt Strip 1 pack

90 x 164mm

Soft, self adhesive, non marking and easily cut to size required. Helps to protect floors from dents and scratches. Before installation prepare surface by cleaning and lightly sanding to ensure better adhesion of the pads.



Kingston Felt Pads Multipack

19mm/26mm/38mm

Kingston Felt Pads are selfadhesive and help to protect floors from dents and scratches. Before installation. prepare surface by cleaning and lightly sanding to ensure better adhesion of the pads.



Kingston Felt Pads 32 pack

19mm

Kingston Felt Pads are selfadhesive and help to protect floors from dents and scratches. Before installation. prepare surface by cleaning and lightly sanding to ensure better adhesion of the pads.



Kingston Felt Pads 16 pack

26mm

Kingston Felt Pads are selfadhesive and help to protect floors from dents and scratches. Before installation, prepare surface by cleaning and lightly sanding to ensure better adhesion of the pads.



Kingston Felt Pads 8 pack

38mm

Kingston Felt Pads are selfadhesive and help to protect floors from dents and scratches. Before installation. prepare surface by cleaning and lightly sanding to ensure better adhesion of the pads.

NOTES	NOTES

1 DEFINITIONS

The Company means Wood Floors & Accessories Limited.

The Customer means the Customer of the Company.

The contract means the sale of goods between the Company and the Customer.

The goods mean the parts and materials sold from the Company to the Customer.

2. PRICES

Printed prices are subject to VAT and correct at the time of release but are subject to change without prior or written notice.

3. QUOTATIONS

All quotations are valid for 14 days and are subject to current stock availability from our suppliers.

4. DELIVERY

Adequate labour must be provided by the Customer at time of unloading of goods and will only be delivered to ground floor entrances and not unloaded into the premises.

All delivery dates quoted are approximate and the Company may not be liable for any costs incurred due to late deliveries.

Risk of the goods is passed to the Customer once they have been delivered.

5. STORAGE

The Customer shall store the goods in accordance with the British Standard Institute recommendations, unless otherwise stated.

6. CLAIMS & NOTIFICATIONS

Any claims for non delivery must be notified in writing to the Company within 24 hours.

Any claim that the goods were delivered damaged must be noted on the delivery note and notified in writing to the Company within 24 hours of delivery.

Any claims for the incorrect quantity being delivered must be notified in writing to the Company within 24 hours.

The Company will only accept responsibility for the first 1m²/Pack/Sheet/ Unit of sale of any product rejected due to poor quality and not an entire quantity.

The Company must be given the opportunity to investigate via a third party consultant any complaint regarding defective goods. In the event of a valid complaint the Company must be given the opportunity to replace the goods with an alternative batch or product and will not be liable for any costs incurred unless prior approval of quotations have been given in writing by the Company.

The Company has no liability for any kind of defects resulting from wear and tear, accident or improper use of the products supplied.

7. RETURNS & CANCELLATIONS

Stock products returned in their original condition will be subject to a 10% re- stocking charge to cover internal costs.

Certain products must be returned within 7 days and have matching batch numbers to those taken.

Any non stock products may be returned, at management's discretion, and will be subject to the manufacturers re-stocking fee.

Any bespoke products ordered will be subject to a 50% non refundable deposit and 100% cancellation charge.

Any incurred carriage costs will be quoted and charged at cost prices.

8. MOISTURE CONTENT, PRODUCTION & GRADING

The moisture content of any wood supplied by the Company will be in accordance with the British Standard Institute recommendations unless otherwise stated.

Any complaints as to the moisture content must be made in writing to the Company within 24 hours of delivery.

Any goods delivered by the Company must be stored in dry conditions in accordance with the British Standard Institute recommendations unless otherwise stated.

Grading rules may vary from country to country and manufacturer to manufacturer. Please check at time of placing an order for a certain product/range.

Production tolerances may vary from country to country and manufacturer to manufacturer but will generally be \pm 1 mm on the widths and \pm 0.50mm on the lengths.

9. SAMPLES

All samples given by the Company to the Customer should only be used as an indication of colour and not as a true representation of the size, colour and grade of the product.

10. BESPOKE FINISHING

Although every effort is taken to control our finishing processes samples should be used as a general guideline to the final colour and shades. As natural tannin levels may vary from tree to tree the colours achieved in our smoked finishes enhance the inherent variation that nature dictates.


Bespoke finished orders are subject to a 100% cancellation charge and non returnable. We recommend a minimum 10% is allowed for selection waste on site and more should you require more consistency of colour.

All prices are correct at the time of going to press and are subject to vat at the current rate.

Please note that colour representation is not entirely accurate and is for guide purposes only.

Products not included in the delivery pricing structure due to either their size,

weight or flammability properties include reclaimed floorboards, softwood battens - dependent on quantity, some underlays, pro card, plywood and hardboard. • In line with Environmental Legislation ISO14001, delivery charges are now POA only on products over 5kg per unit which are classed as hazardous goods.

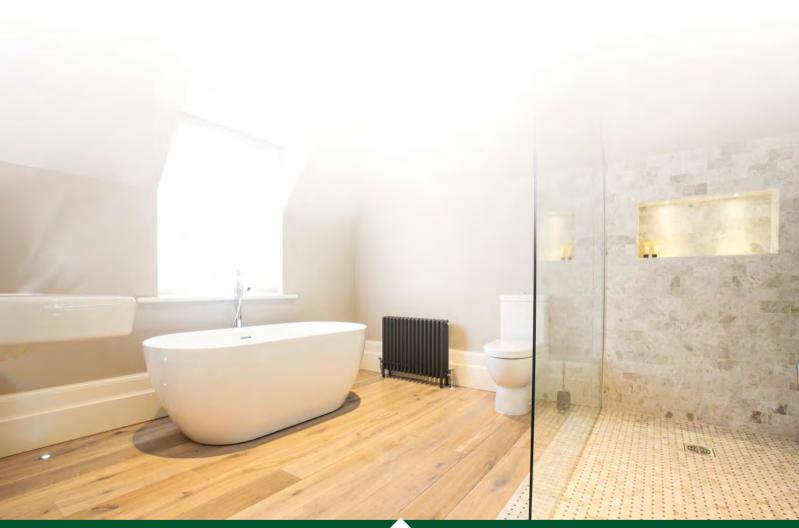





CALL 020 8501 6730

info@wfa.uk.net • www.wfa.uk.net Spilsby Road • Harold Hill • Romford • Essex • RM3 8SB



